


| | |
|---|---|
| BODY 100' Ascendant Aerial Tower Alum Body COMPT, DRIVER SIDE Full Height RollUp Doors COMPT, PASSENGER SIDE Full Height RollUp Doors | WATER TANK 300 Gallon Poly Water Tank Foam System Foam System Not Required Foam Cell Foam Cell Not Required |
|---|---|

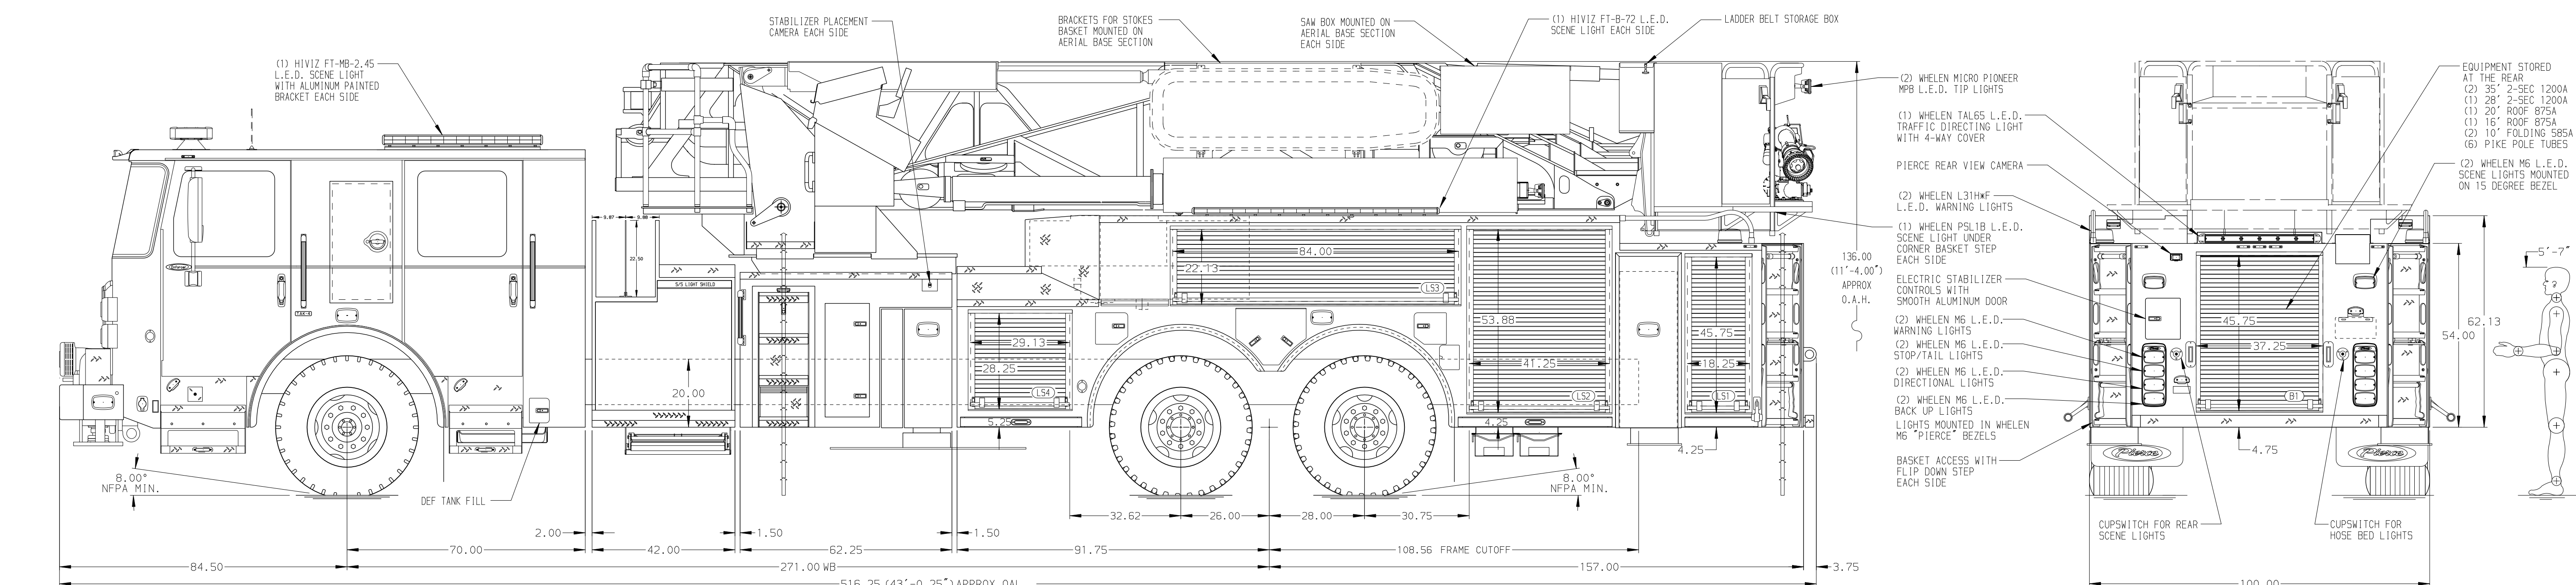

| | | | | | | | | | | |
|--|--|--|--|---|--|--|---|---|---|--|
| CHASSIS Enforcer Chassis 510 HP Paccar MX13 Engine | CAB 7000 Enforcer Cab 15' Extended Painted Aluminum | AXLE, FRONT, CUSTOM 24,000 Lb TAK-4 Axle AXLE, REAR 52,640 Lb TAK-4 T3 Axle | TRANSMISSION Allison 6th Gen, 4500 EV5 P | PUMPHOUSE 42" Control Zone Side Mount PUMP 2000 GPM Waterous S100 | CROSSLAYS, 1.50" (2) 1.50", 200' of 1.75" Hose CROSSLAYS, 2.50" 2.50" Crosslay Not Required | SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required | SAFETY Side Roll and Frontal Impact Protection | CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____ | Pierce MANUFACTURING INC. | JOB NO. 41581 SCALE 1:24 DATE |
| NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN. | | | | | | | | | TITLE 100' ASCENDANT AERIAL TOWER AND BODY ASSEMBLY FOR PIERCE FIELD UNIT APPLETON, WI DWG NO. 41581AD | DRAWN BY ANZ CHECKED BY THS SHEET SIZE D SHEET NO. 1 OF 1 |