


HOSEBED CAPACITIES

①	- 200' OF 2.50" DJP HOSE
②	- 500' OF 2.50" DJP HOSE
③	- 750' OF 2.50" DJP HOSE
④	- OPEN
⑤	- 1500' OF 5.00" DJP HOSE

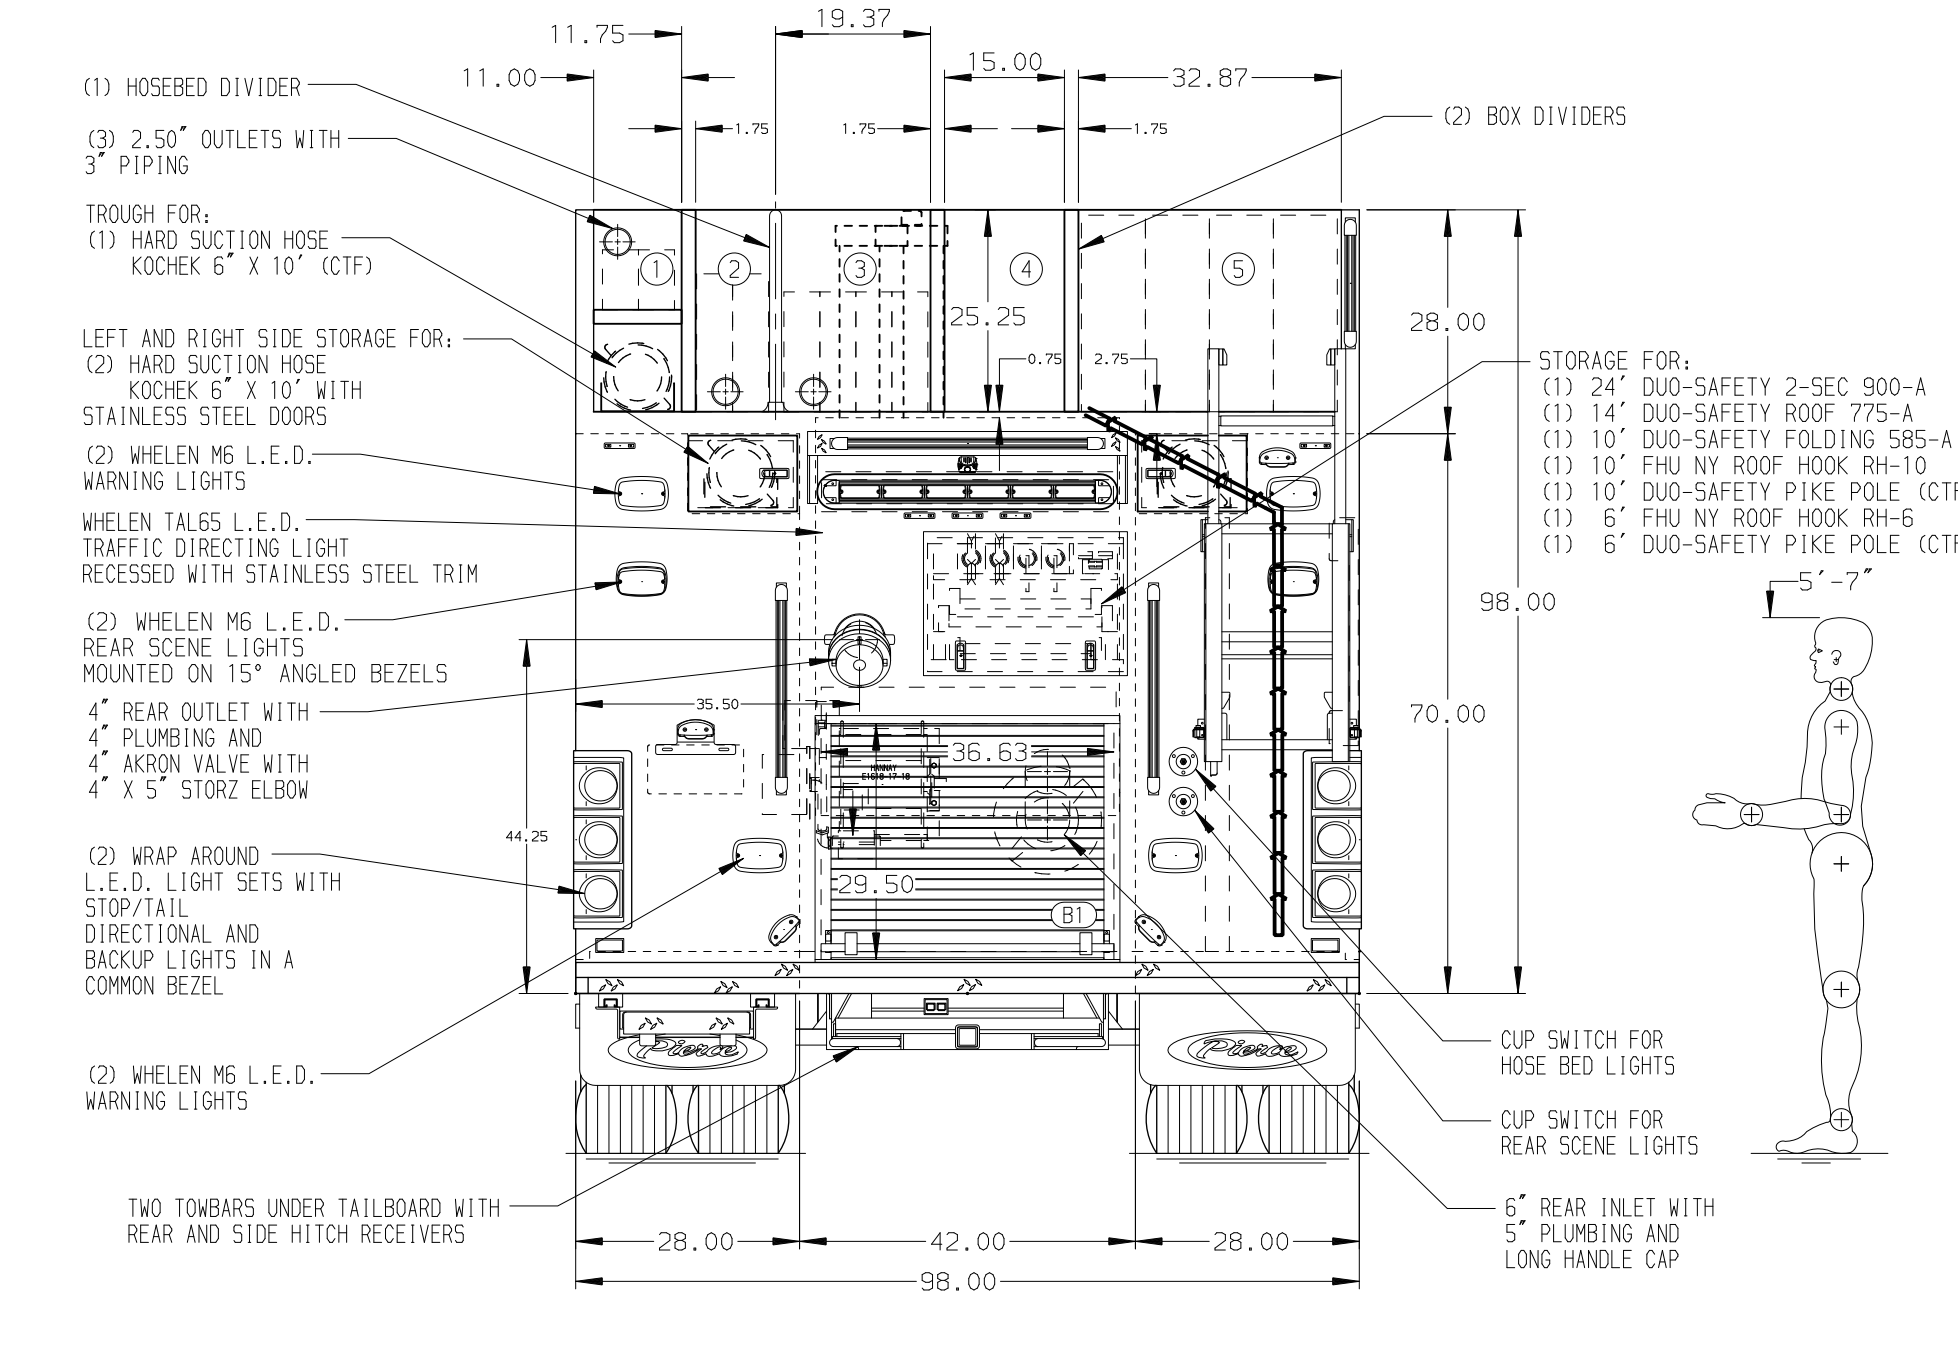

ALUMINUM BODY MAXIMUM O.A.H. 125" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER SIDE CAB
- BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- COLD CLIMATE PACKAGE
- WATER HEATER IN PUMP COMPARTMENT
- ONE HANNAY ELECTRIC REWIND COIL MODEL 1618-17-18 WITH 200' OF 10/4 YELLOW CORD LOCATED IN COMPARTMENT B1

07AUG24	SAM	PHA	CHASSIS DATA
23JUL24	SAM	NPE	MAKE
18JUN24	SAM	NPE	PIERCE
05MAY24	SAM	NPE	MODEL
01MAR24	SAM	PHA	ENFORCER
REV	DATE	BY	CH

Pierce MANUFACTURING INC.

JOB NO. 38417

SCALE 1:24 DATE

TITLE 1500-D-750P, 730G WATER W/20G FOAM, 177" HDRP (3) SPEEDLAYS, LADDER TUNNEL THRU TANK, DELUGE

FOR CEDAR GROVE FIRE DEPARTMENT CEDAR GROVE, WISCONSIN

DWG NO. 38417AD-SH1

DRAWN BY SAM 13DEC23

CHECKED BY NPE 22DEC23

SHEET SIZE D SHEET NO. 1 OF 2