
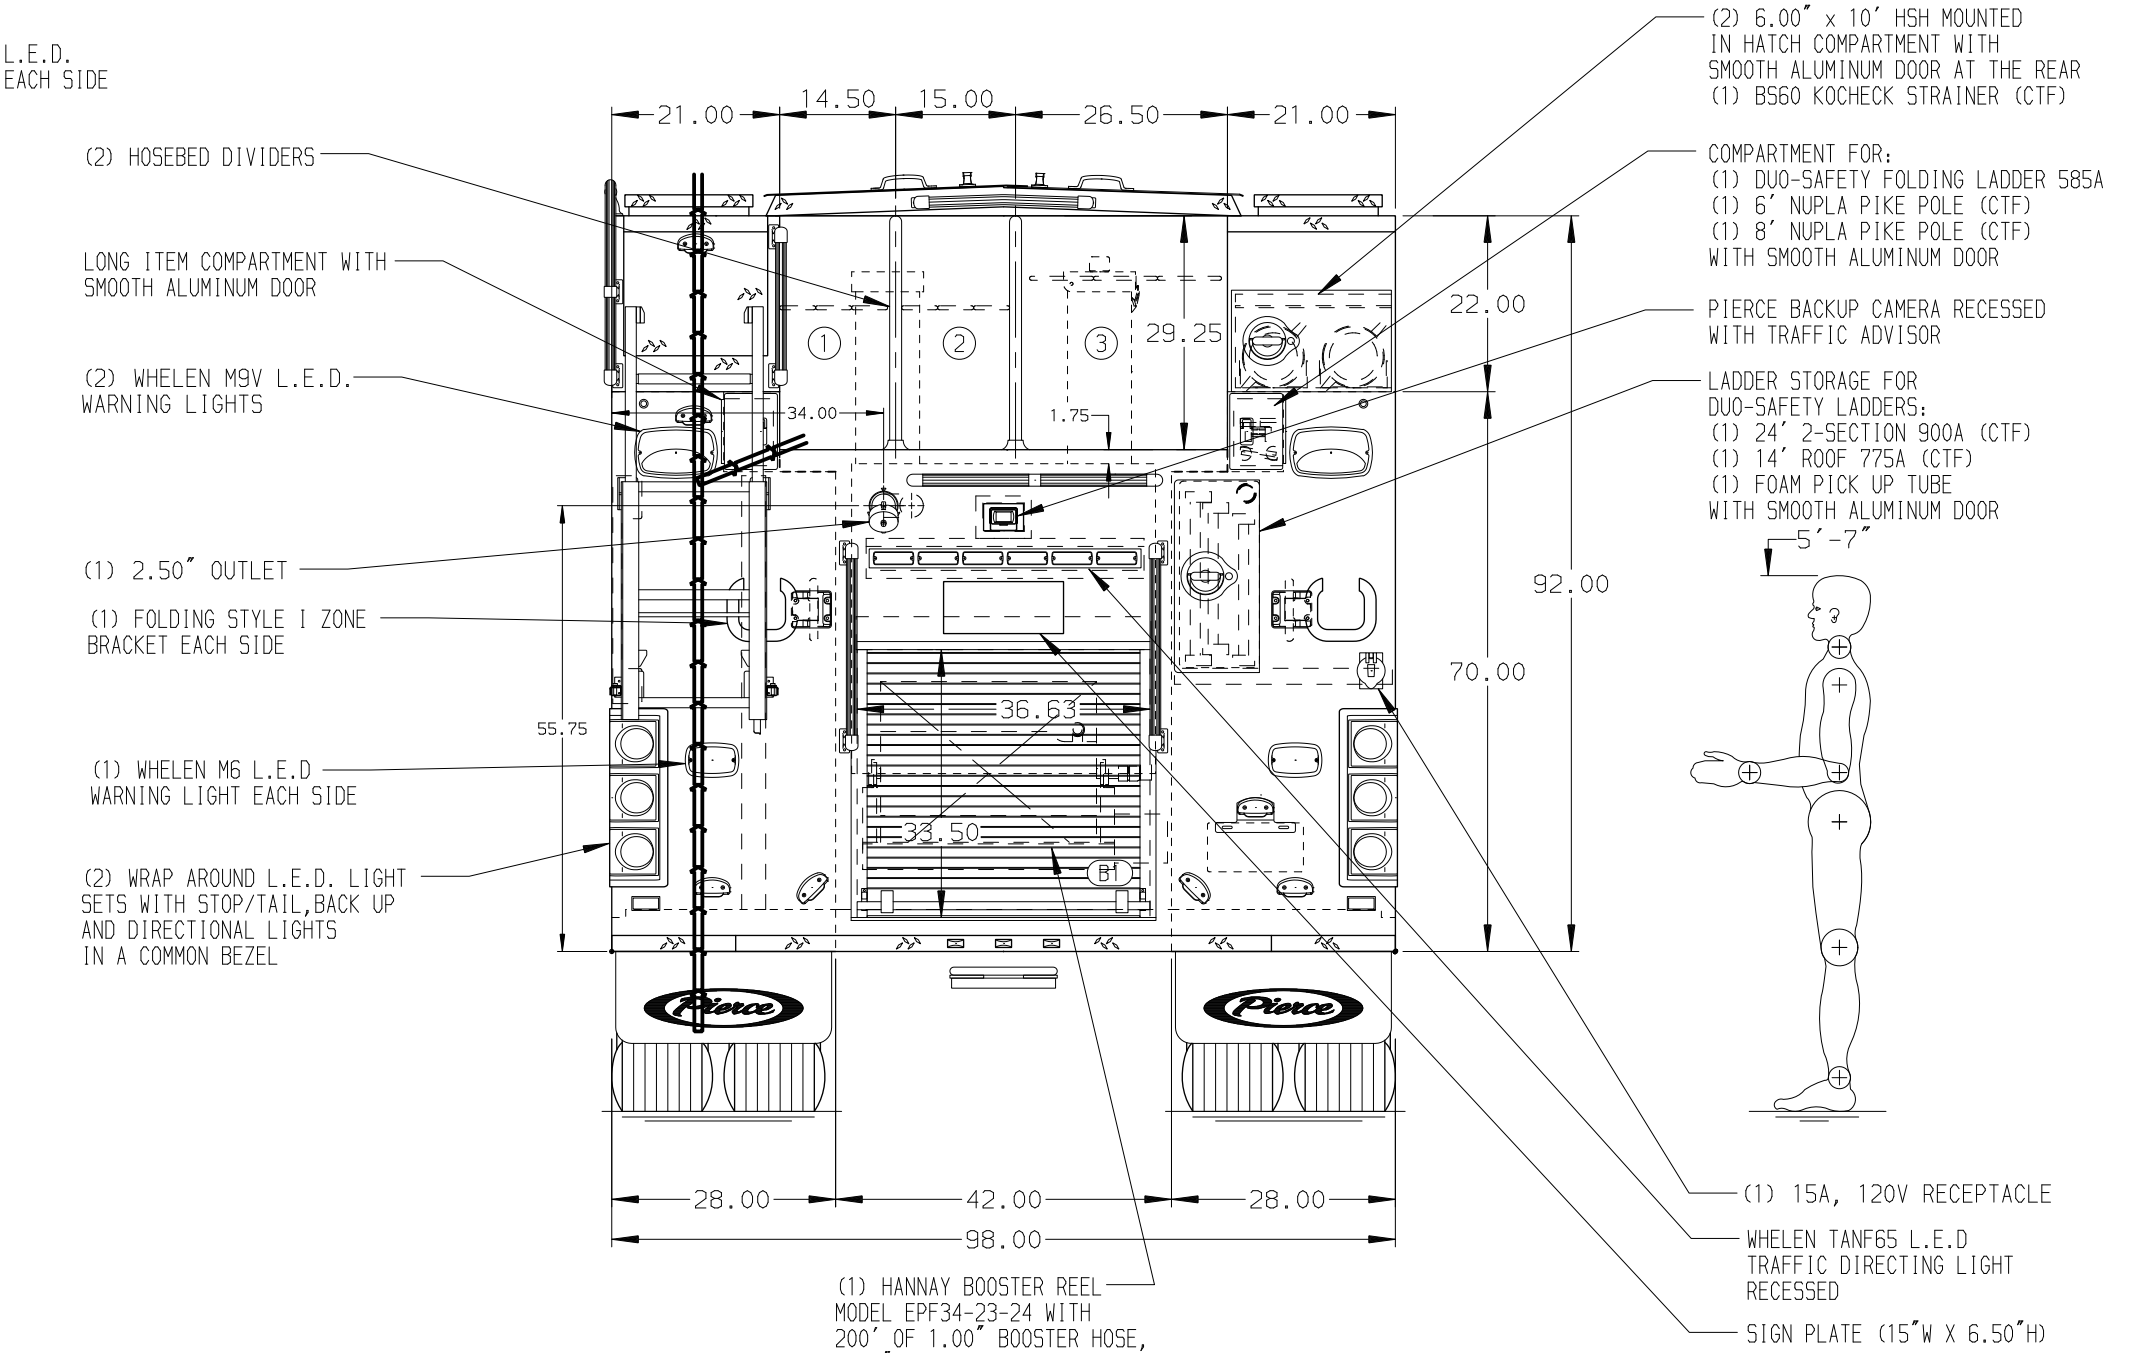


- HOSEBED CAPACITIES**
- ① - 600' OF 2.50" D.J. POLY HOSE
 - ② - 600' OF 2.50" D.J. POLY HOSE
 - ③ - 750' OF 5.00" D.J. POLY HOSE

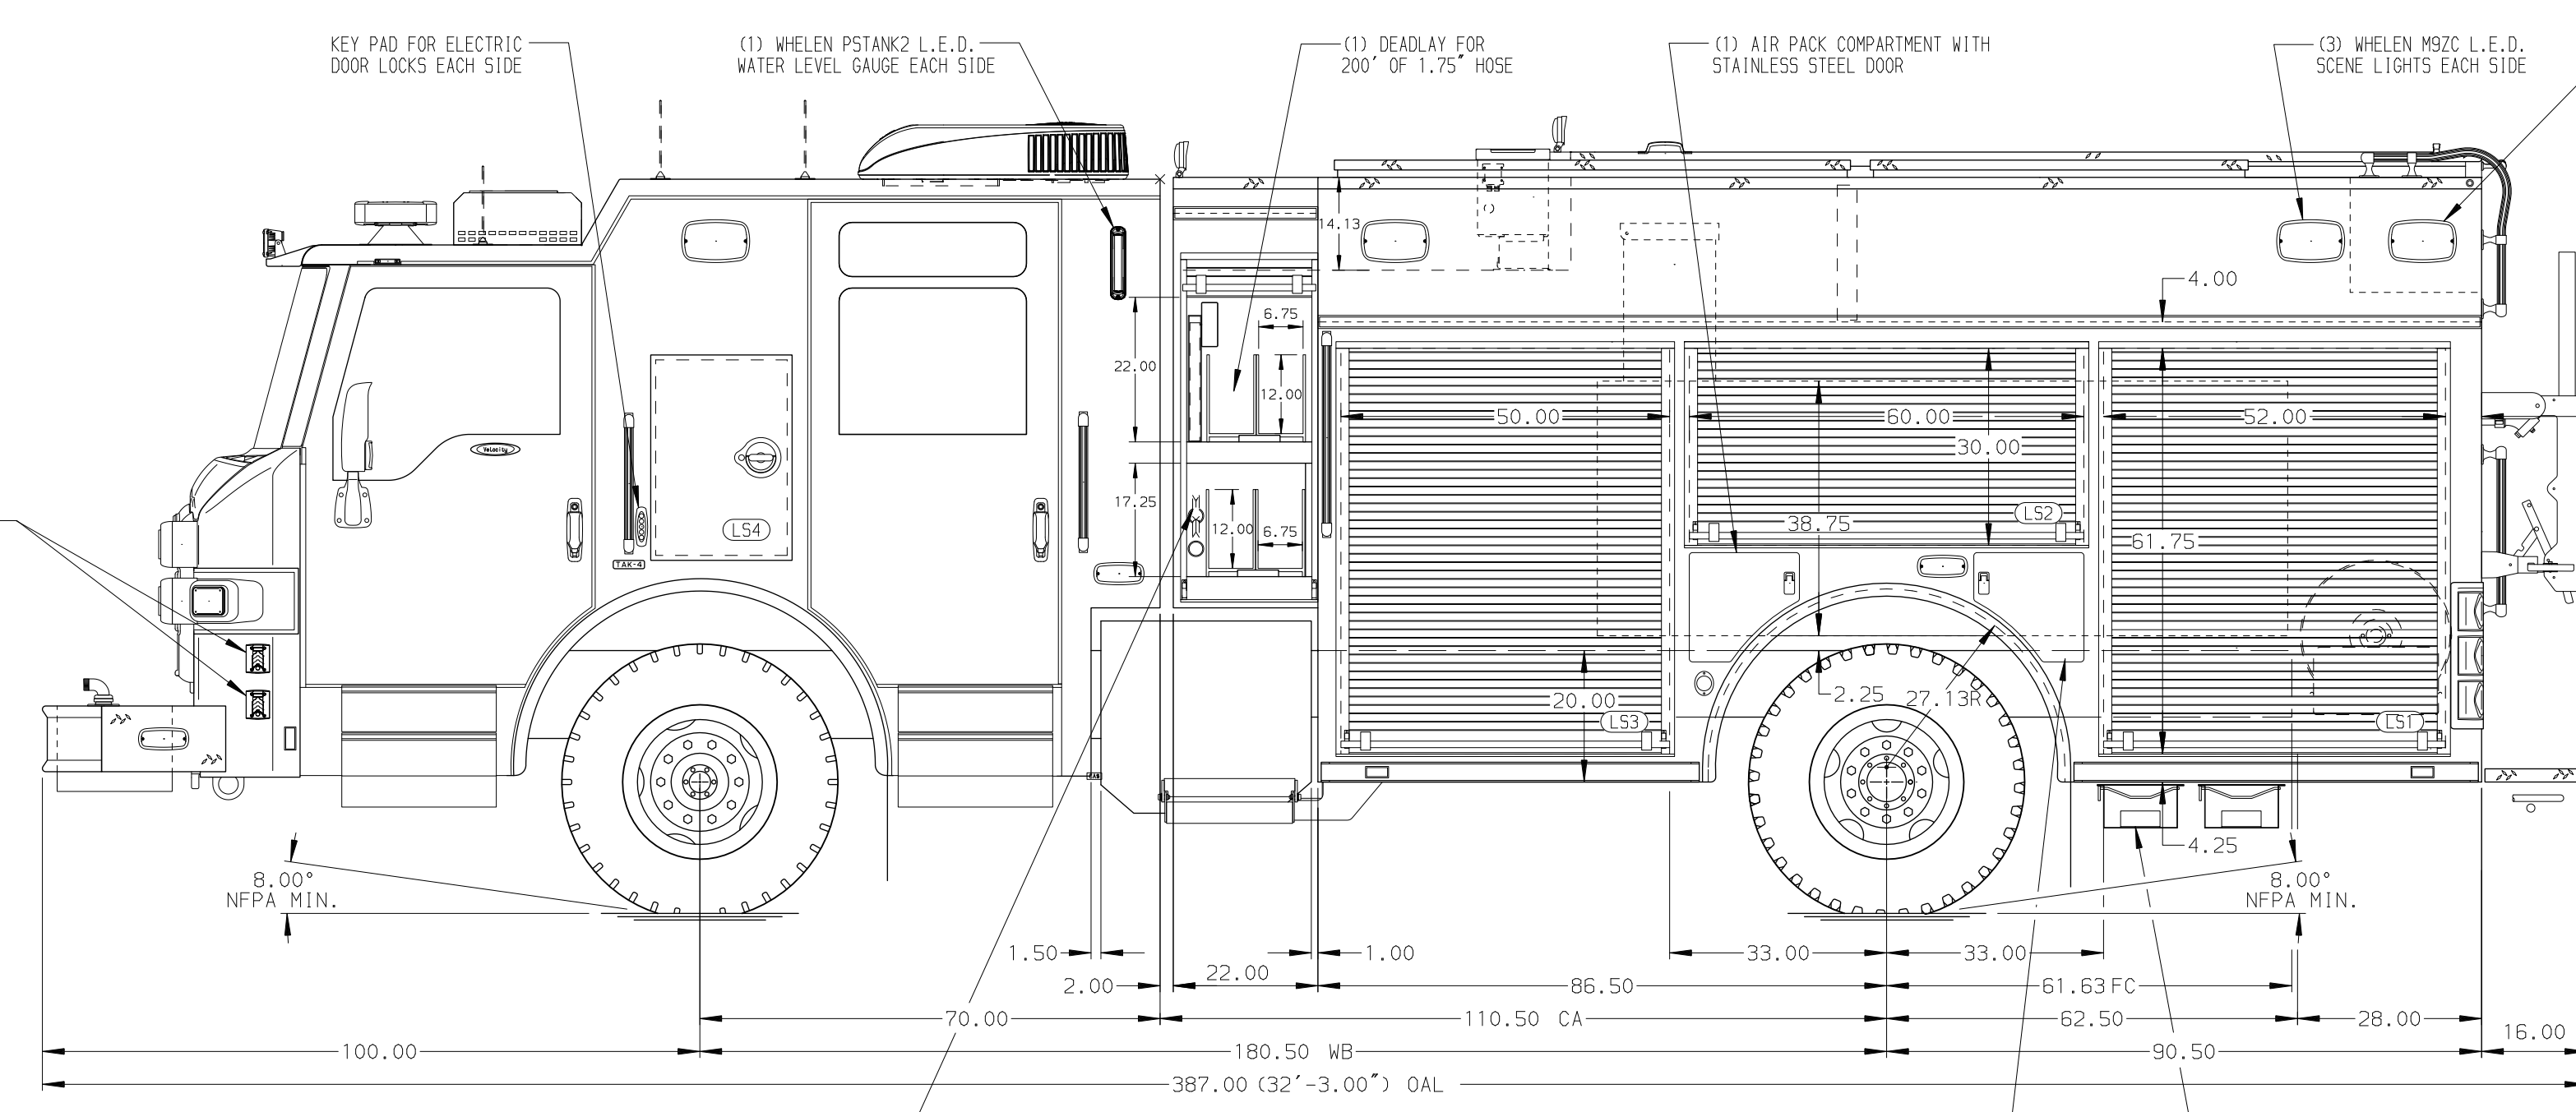

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. PLUMBING DIAGRAM REQUIRED
2. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED AT RS & LS PUMP PANELS
3. ONE HORIZONTAL PARTITION LOCATED IN COMPARTMENT LS3
4. LITTLE GIANT LADDER LOCATED IN COMPARTMENT LS1
5. ONE VERTICAL PARTITION LOCATED IN COMPARTMENT LS1
6. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1

REV	DATE	BY	CH	VELOCITY
08MAR24	JAM	JLL		
26JAN24	JUB	EGO		

		JOB NO.	38442
		SCALE	1:24
TITLE 1500-D-555P, 525G WATER, 30G FOAM, 177" FH/FD PUC LADDERS BTWN TANK & SS, DELUGE, (3)XLAYS, (1)DEADLAY FOR CLOVIS FIRE DEPARTMENT CLOVIS, CALIFORNIA	DATE 09JAN24 CHECKED BY WKL 16JAN24 SHEET SIZE D 1 OF 1	DRAWN BY	JJB
		DATE	09JAN24
DWG NO.	38442AD	SHEET NO.	1 OF 1