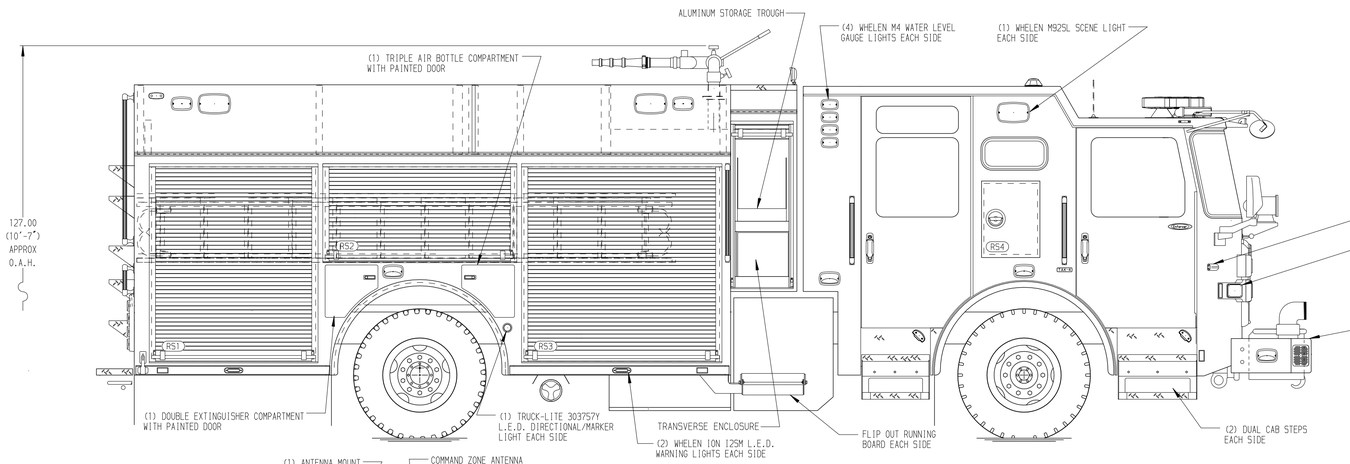

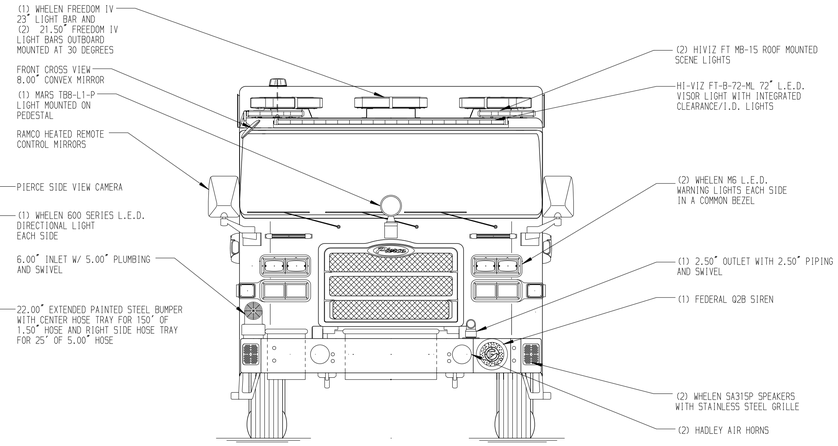

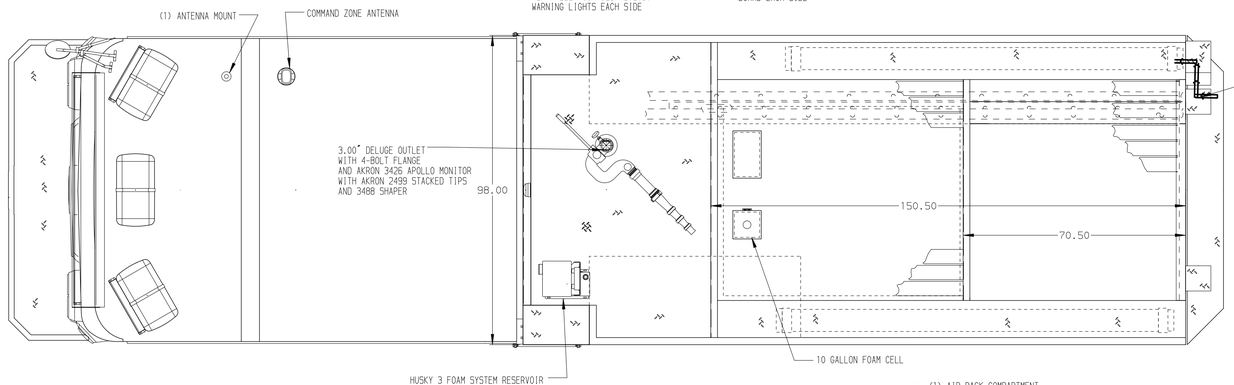

HOSEBED CAPACITIES

1. 600' OF 2.50" D.J. POLY HOSE
2. 200' OF 1.75" D.J. POLY HOSE
3. 200' OF 1.75" D.J. POLY HOSE
4. 200' OF 2.50" D.J. POLY HOSE
5. 800' OF 5.00" D.J. POLY HOSE

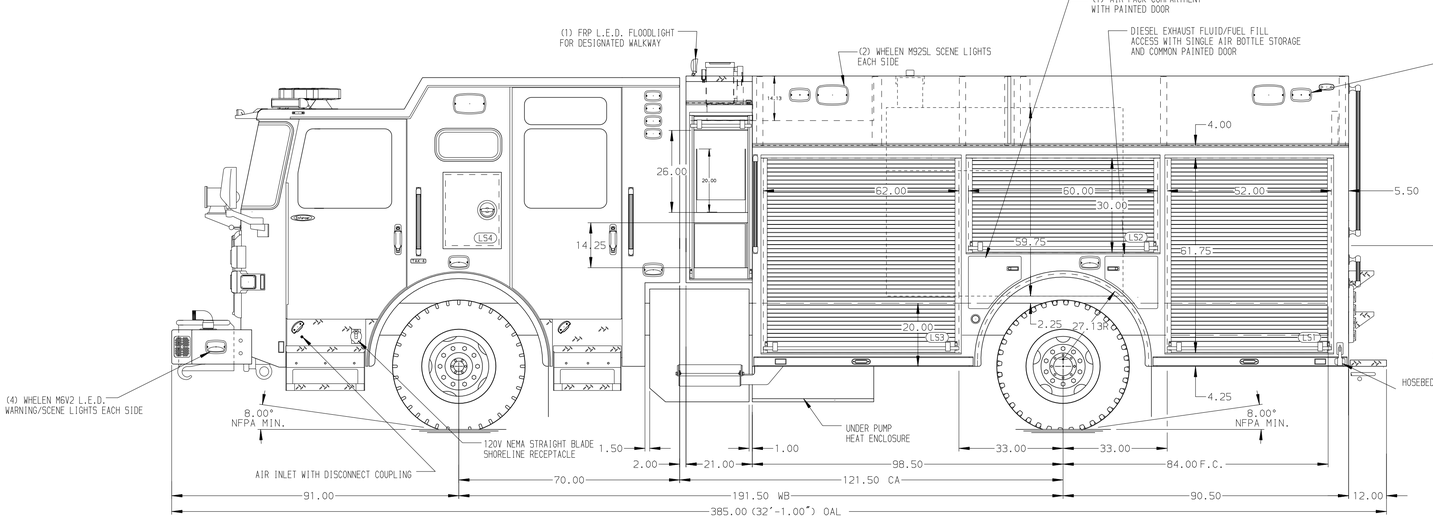

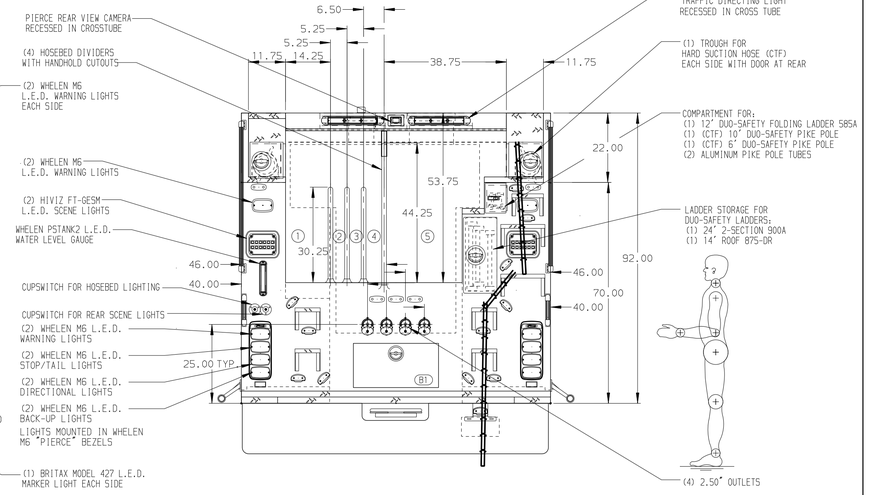

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN LS3
2. BATTERY CHARGER INDICATOR LOCATED ON THE DRIVER'S SEAT RISER
3. WHEEL CHOCKS AND BRACKETS (CTF)

REV	DATE	BY	CH
V	07NOV24	LST	CLM
V	23AUG24	LST	CLM
V	20JUN24	LST	CLM
V	17MAY24	LST	CLM
V	10MAY24	LST	CLM

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-760P, 750 GAL OF WATER W/ 10 GAL FOAM CELL DELUGE,LIGHT TOWER,LADDERS THRU BODY
FOR: EXCELSIOR FIRE DISTRICT, SHOREWOOD, MINNESOTA
DWG NO.: 38450AD

JOB NO.: 38450
SCALE: 1:24
DATE:
DRAWN BY: LST — 24JAN24
CHECKED BY: EGO — 31JAN24
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 07-NOV-2024 12:32:38