


HOSEBED CAPACITIES

①	- 200' OF 2.50" HOSE
②	- 800' OF 4.00" HOSE
③	- 500' OF 2.50" HOSE
④	- 500' OF 2.50" HOSE

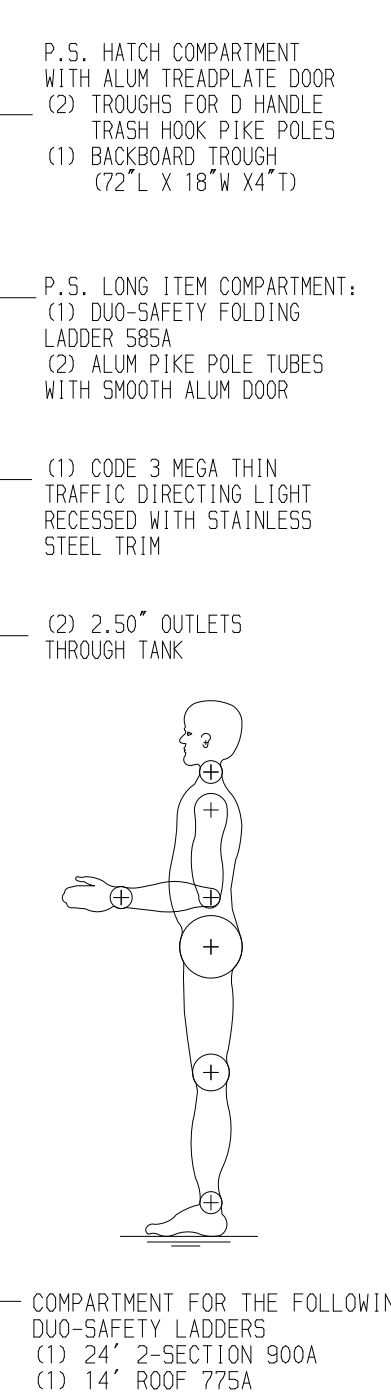

ALUMINUM BODY MAXIMUM O.A.H. 120.00" SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. S/STL SCUFFPLATE ON REAR OUTER CORNERS OF CAB
3. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
4. BATTERY CHARGER LOCATED IN CAB PER SHOP ORDER
5. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
6. TWO 1-ZONE BRACKETS LOCATED AT REAR PER THE SHOP ORDER
7. STORAGE TUBE FOR HYDRANT WRENCH AND RUBBER MALLET LOCATED ON THE FRONT BUMPER PER SHOP ORDER

CHASSIS DATA	TITLE	1500-D-500 500 GAL WATER, 30 GAL FOAM TANK, 177" PUC FULL HGT & DPTH COMPTS, LDDRS IN PS BODY, (2) XLAYS
MAKE	FOR	ANAHEIM FIRE DEPARTMENT ANAHEIM, CALIFORNIA
MODEL	DWG NO.	38504AD-SH1
VELOCITY	SHEET NO.	1 OF 2

REV	DATE	BY	CH
24APR24	LST	-	PIERCE
08MAR24	LST	BSE	MODEL

Pierce MANUFACTURING INC.

JOB NO. 38504

SCALE 1:24 DATE

DRAWN BY LST 16NOV23

CHECKED BY BSE 17NOV23

SHEET SIZE D SHEET NO. 1 OF 2