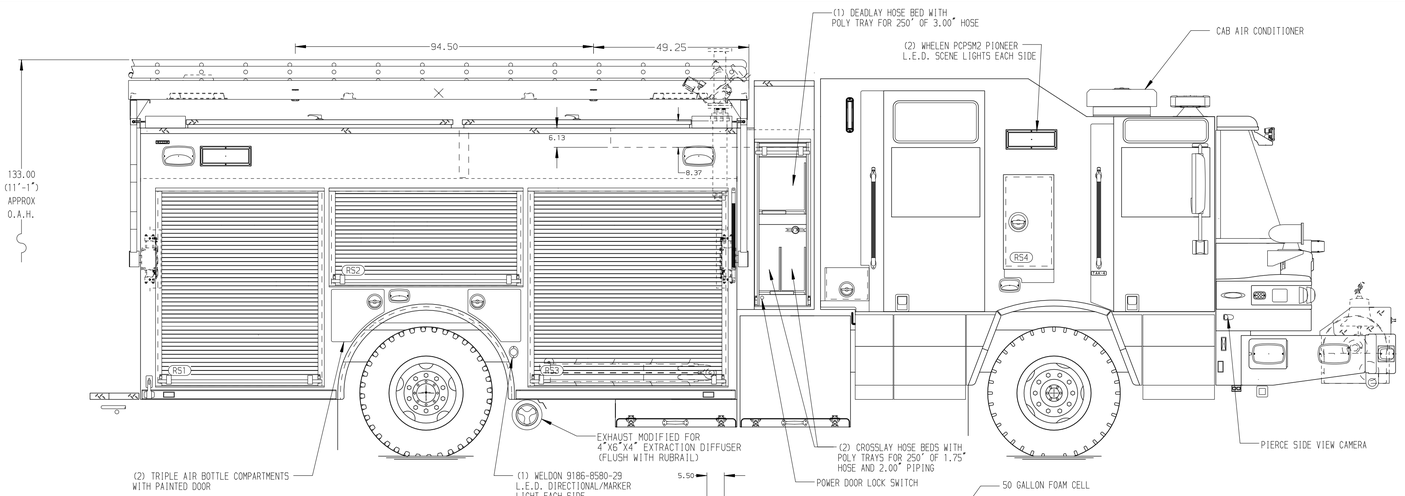

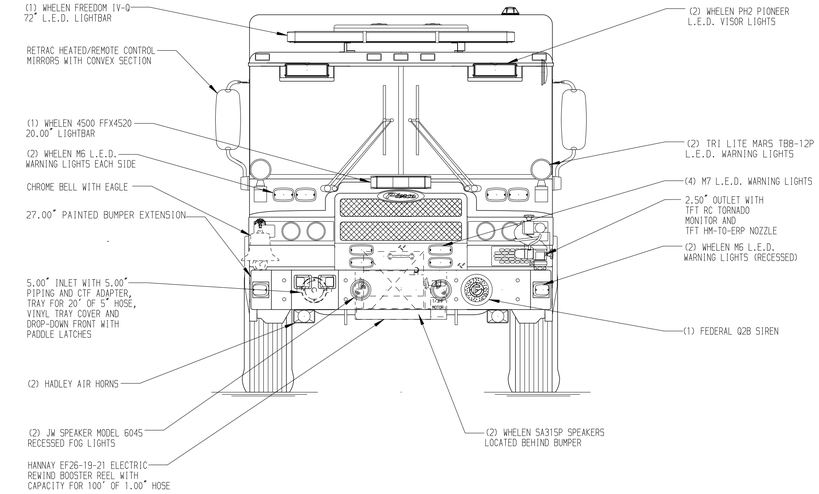

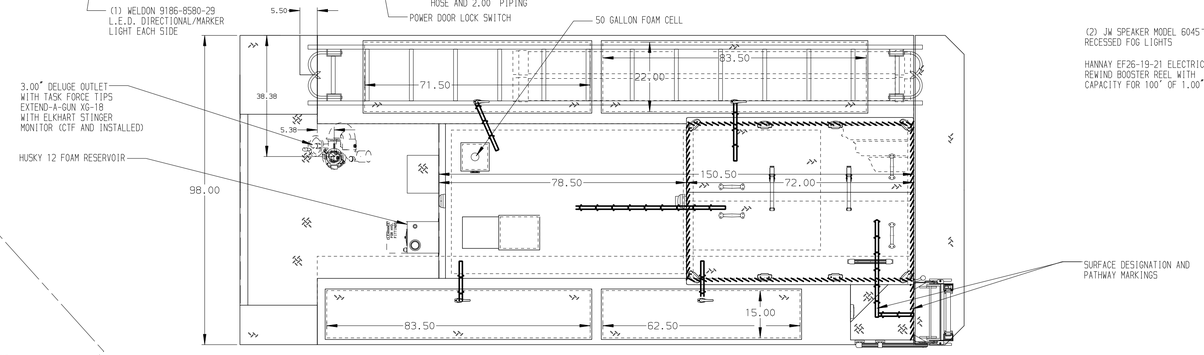

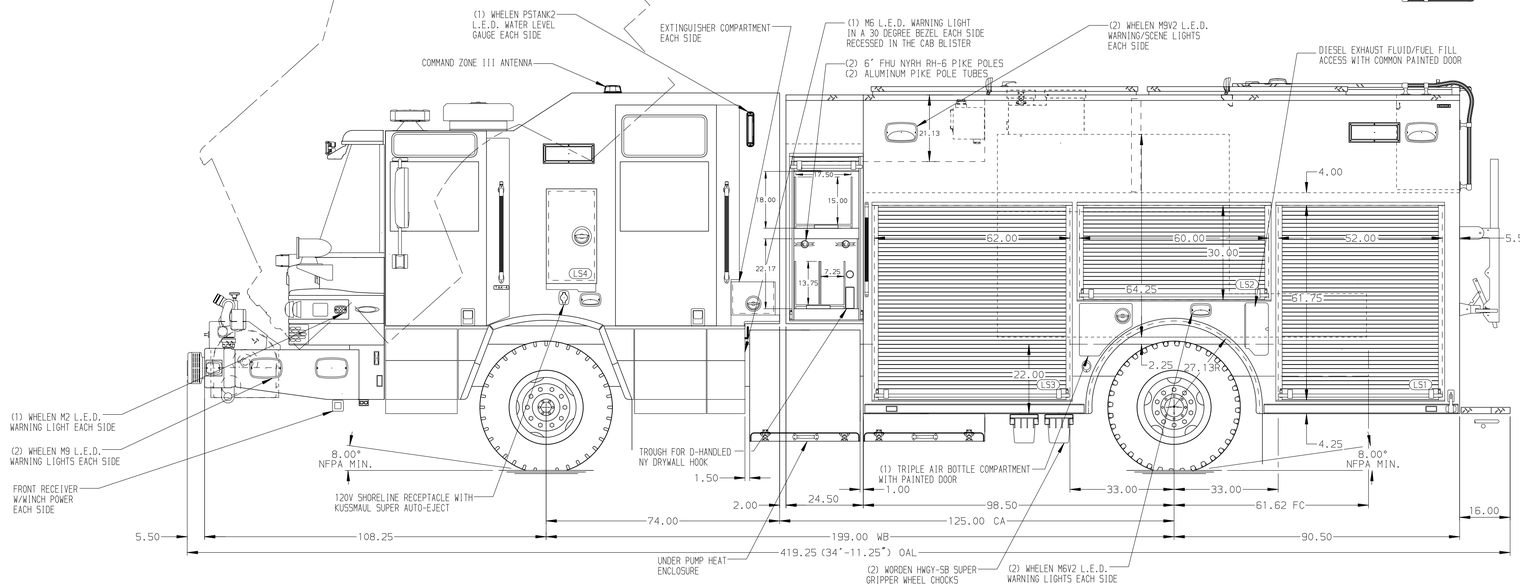

HOSEBED CAPACITIES

1. 550' OF 5.00" D.J. POLY HOSE (WITH OASIS VALVE TO BUMPER)
2. 550' OF 5.00" D.J. POLY HOSE
3. 200' OF 2.50" HOSE IN A POLY TRAY (WITH 150' OF 1.75" ON EDGE)
4. 200' OF 1.75" HOSE IN A POLY TRAY
5. 250' OF 2.50" HOSE IN A POLY TRAY (WITH RAM NOZZLE)

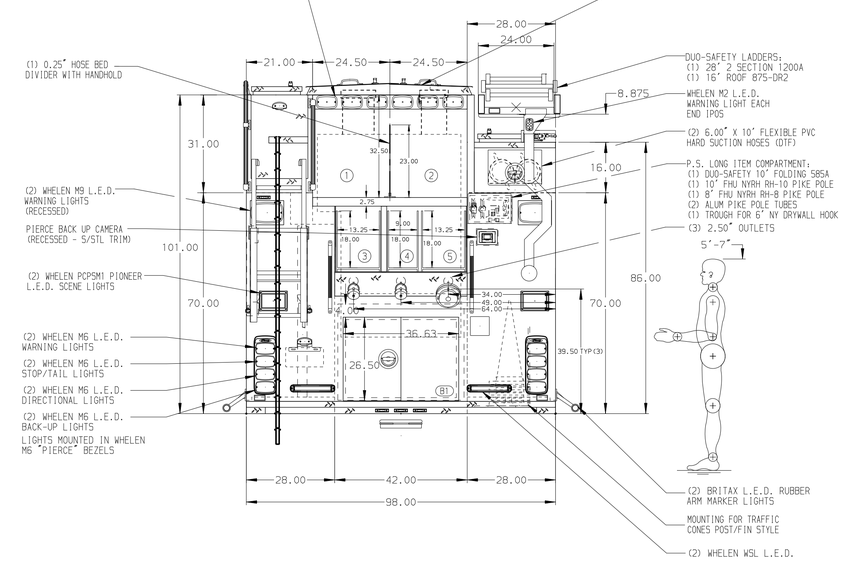

ALUMINUM BODY

MAXIMUM O.A.H. 135.00"

REF PREVIOUS JOB 34502

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER/CONVERTER LOCATED IN LS3
2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. ROADPRO 12V ELECTRIC HEATER WITH THERMOSTAT IN COMPARTMENT RS3
4. AIR INLET WITH DICONNECT COUPLING DS SEAT RISER

REV	DATE	BY	CH
3	30JUL24	JAM	PHA
2	11JUN24	JAM	PHA
1	18APR24	JAM	PHA

CHASSIS DATA
MAKE: PIERCE
MODEL: QUANTUM

PIERCE MANUFACTURING INC.

TITLE: 1500 GPM, 800G TANK, 750G WATER, 50G FOAM 189" PUC RESCUE, MUX
FOR: CITY OF WAUKESHA FIRE DEPARTMENT WAUKESHA, WISCONSIN
DWG NO. 38883AD

JOB NO. 38883
SCALE 1:24
DATE
DRAWN BY JAM 04APR24
CHECKED BY PHA 08APR24
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 09-AUG-2024 12:36:54