
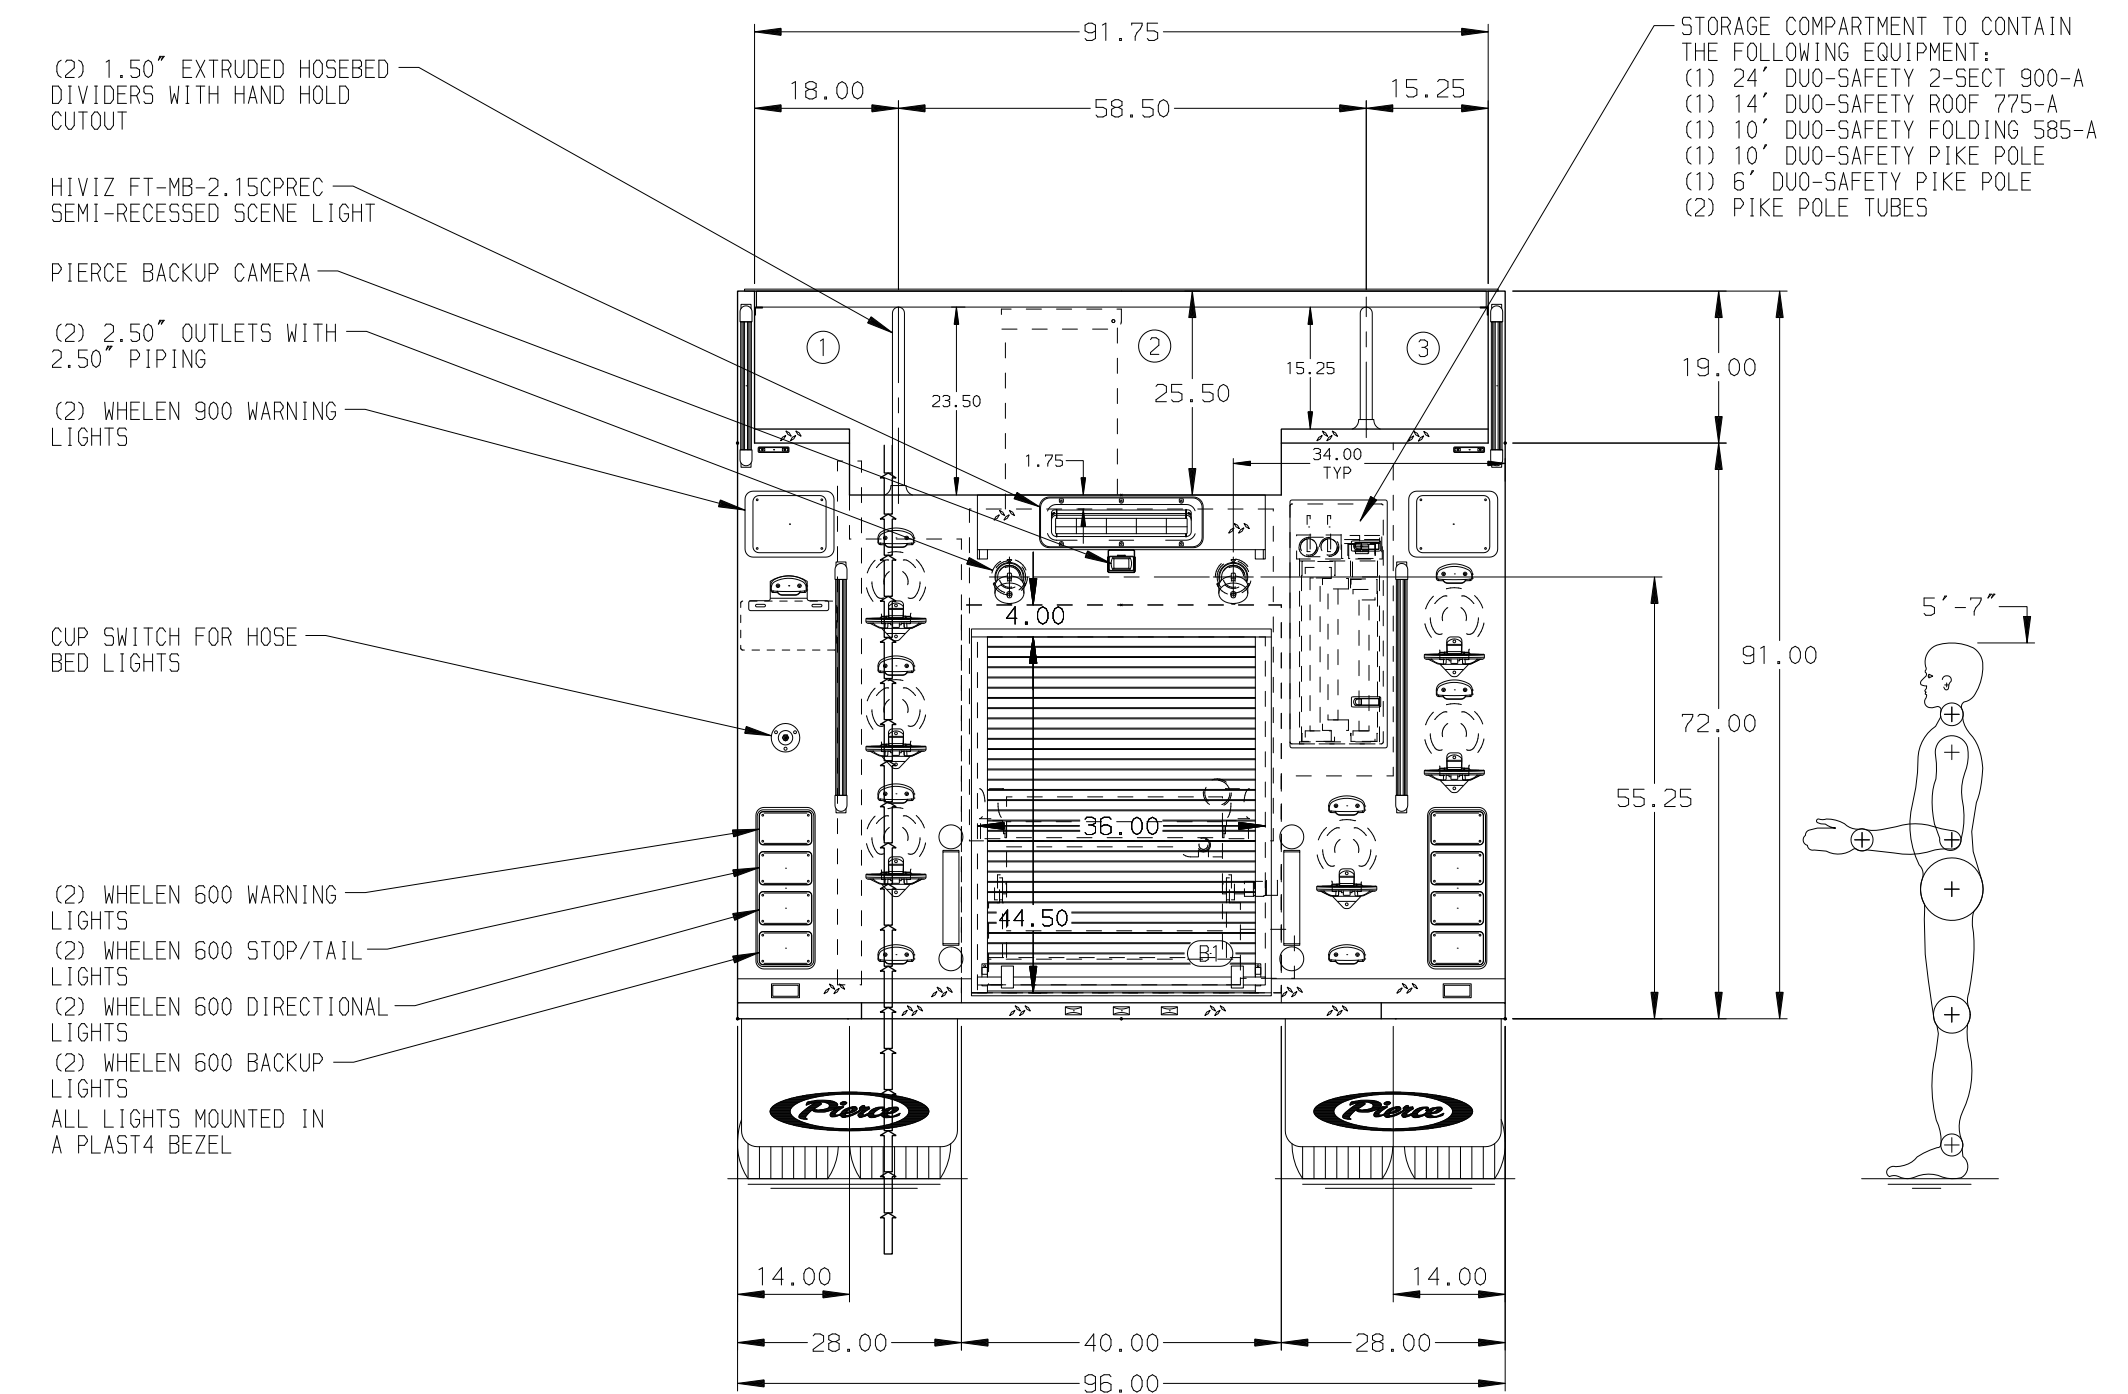


- HOSEBED CAPACITIES
- ① 500' OF 2.50" D.J. POLY HOSE
 - ② 2000' OF 5.00" D.J. POLY HOSE
 - ③ 200' OF 2.50" D.J. POLY HOSE

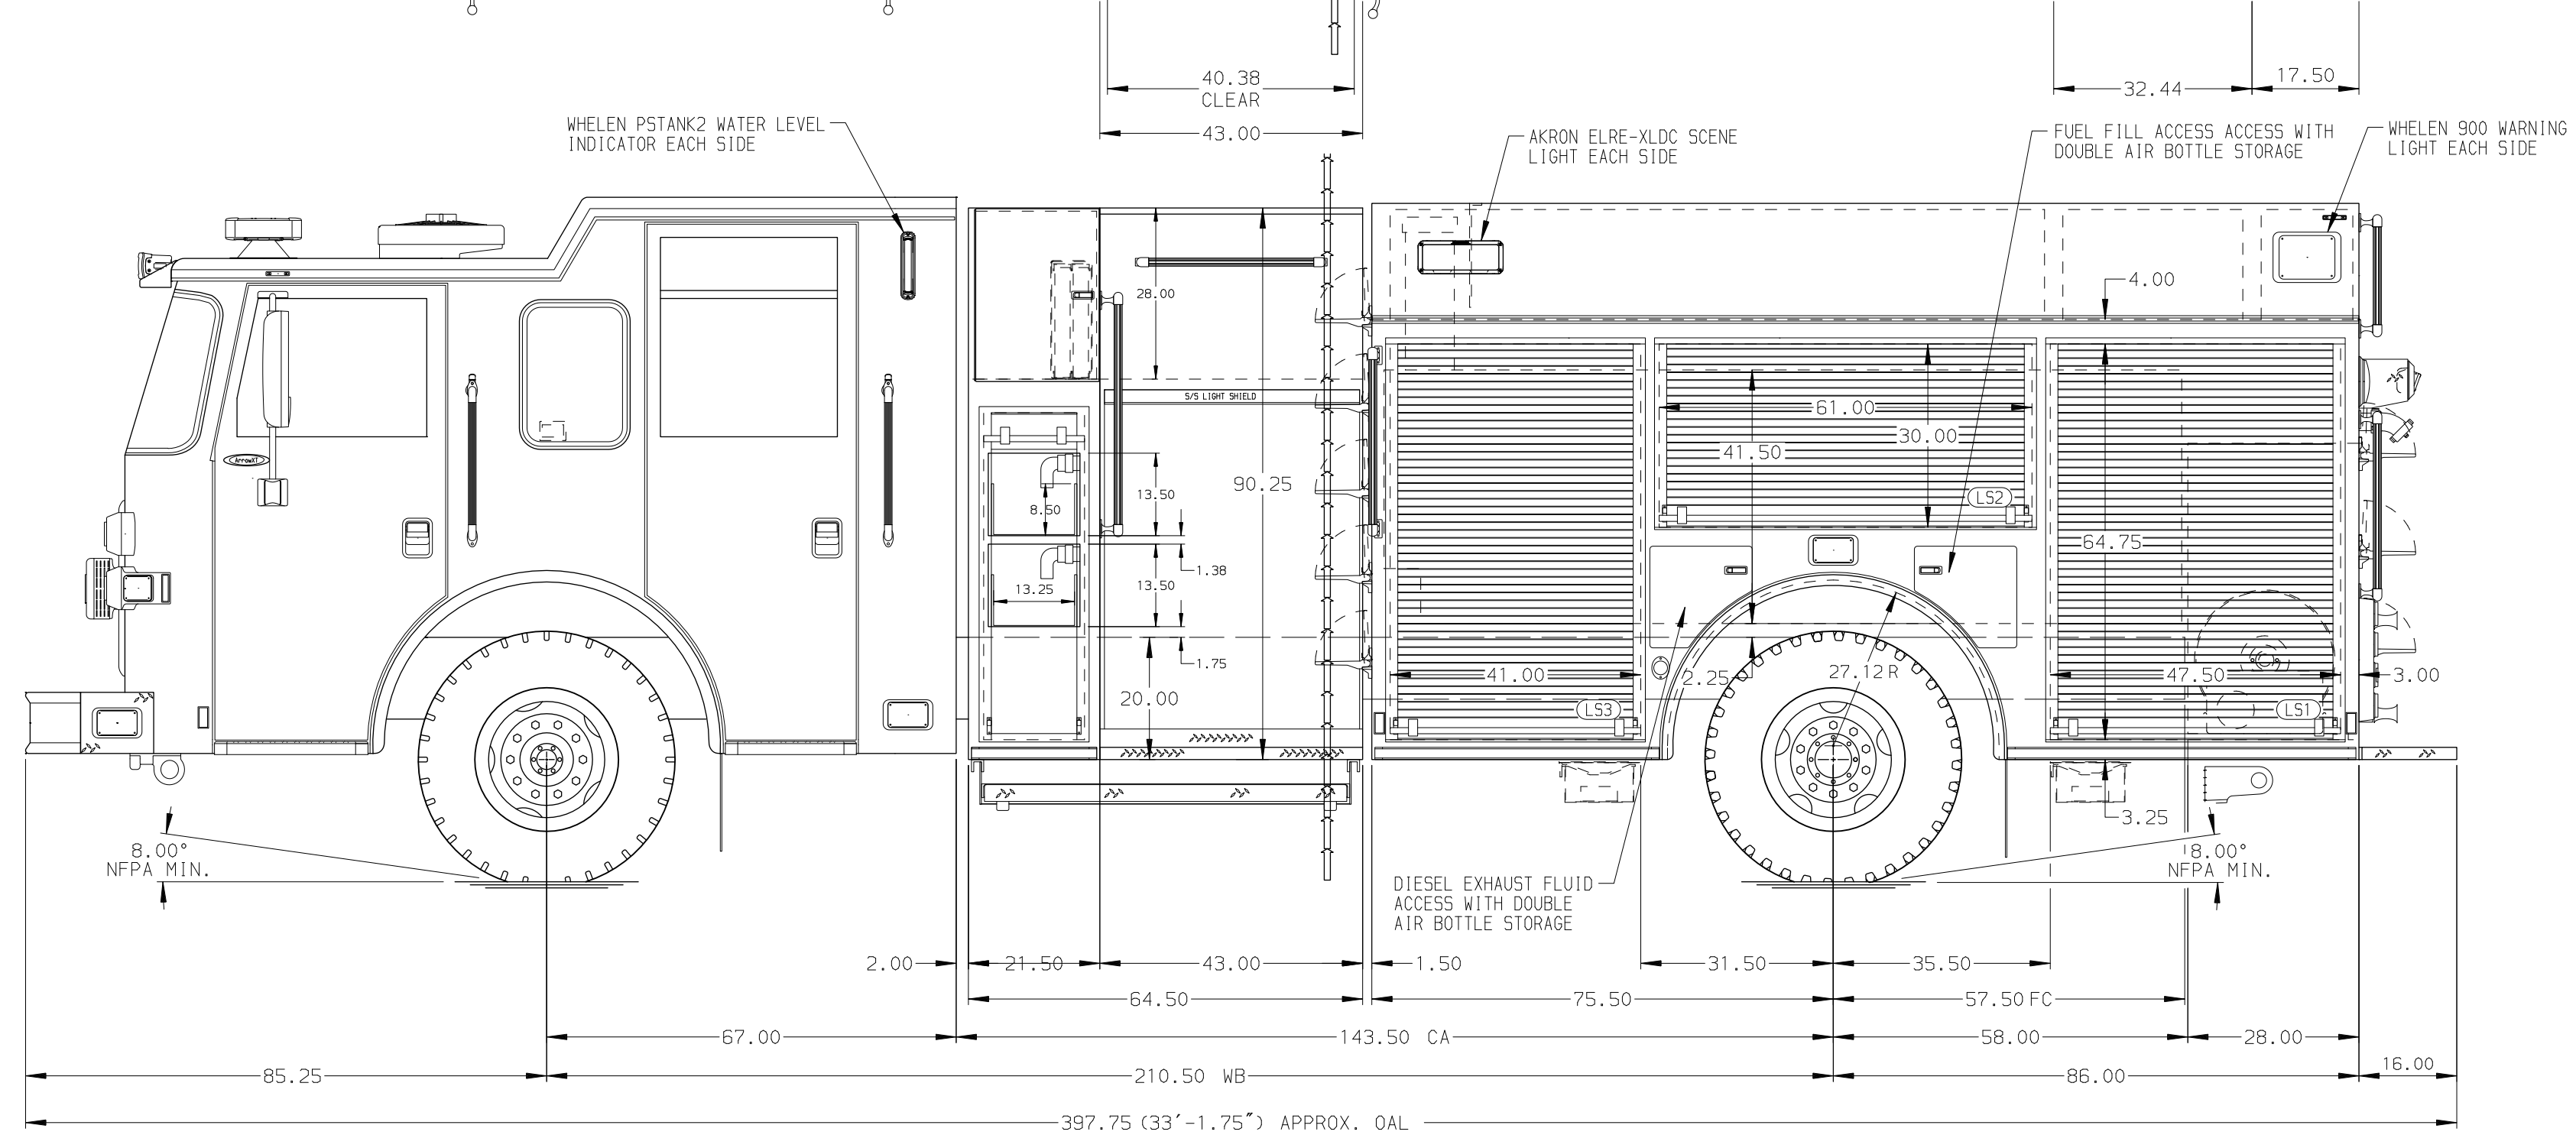

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. HANNAY EF34-23-24 1/2 H.P. ELECTRIC REWIND BOOSTER REEL WITH A CAPACITY FOR 200' OF 0.75" HOSE LOCATED IN COMPARTMENT-B1
2. AIR INLET WITH DISCONNECT FITTING LOCATED IN DRIVER SIDE STEP WELL FORWARD
3. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
4. BATTERY CHARGER INDICATOR LOCATED BEHIND DRIVER SEAT THROUGH SIDE WINDOW
5. 120V KUSSMAUL SHORELINE RECEPTACLE WITH SUPER AUTO EJECT LOCATED ON LEFT SIDE PUMP PANEL

REV	DATE	BY	CH	ARROW	XT
26APR24	LST	JLL			
21MAR24	BST	JLL			

		JOB NO.	38933
		SCALE	DATE
TITLE	1500-D-750P, 161" PUMPER BODY, BOOSTER REEL LADDERS BETWEEN TANK AND BODY, 45" SIDE CONTROL	DRAWN BY	BST 25JAN24
FOR	HUEYTOWN FIRE DEPARTMENT HUEYTOWN, ALABAMA	CHECKED BY	EGO 26JAN24
DWG NO.	38933AD	SHEET SIZE	SHEET NO.
		D	1 OF 1