

PUMPER BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
22,800 Lb TAK-4 Axle

AXLE, REAR
27,000 Lb Dana Axle

ENGINE
500 HP Cummins X12 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY TOTAL TANK CAPACITY
520 Gallon Poly Tank

WATER CAPACITY
500 Gallons of Water

FOAM CELL

COMPT, PUMPER, REAR
30.75" FF RoLup Rear Compt

COMPT, PUMPER, LEFT SIDE
152" RoLup Full Height Front & Rear FDLR

COMPT, PUMPER, RIGHT SIDE
152" RoLup Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE
52" Control Zone Top Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity


SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM

SAFETY
Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

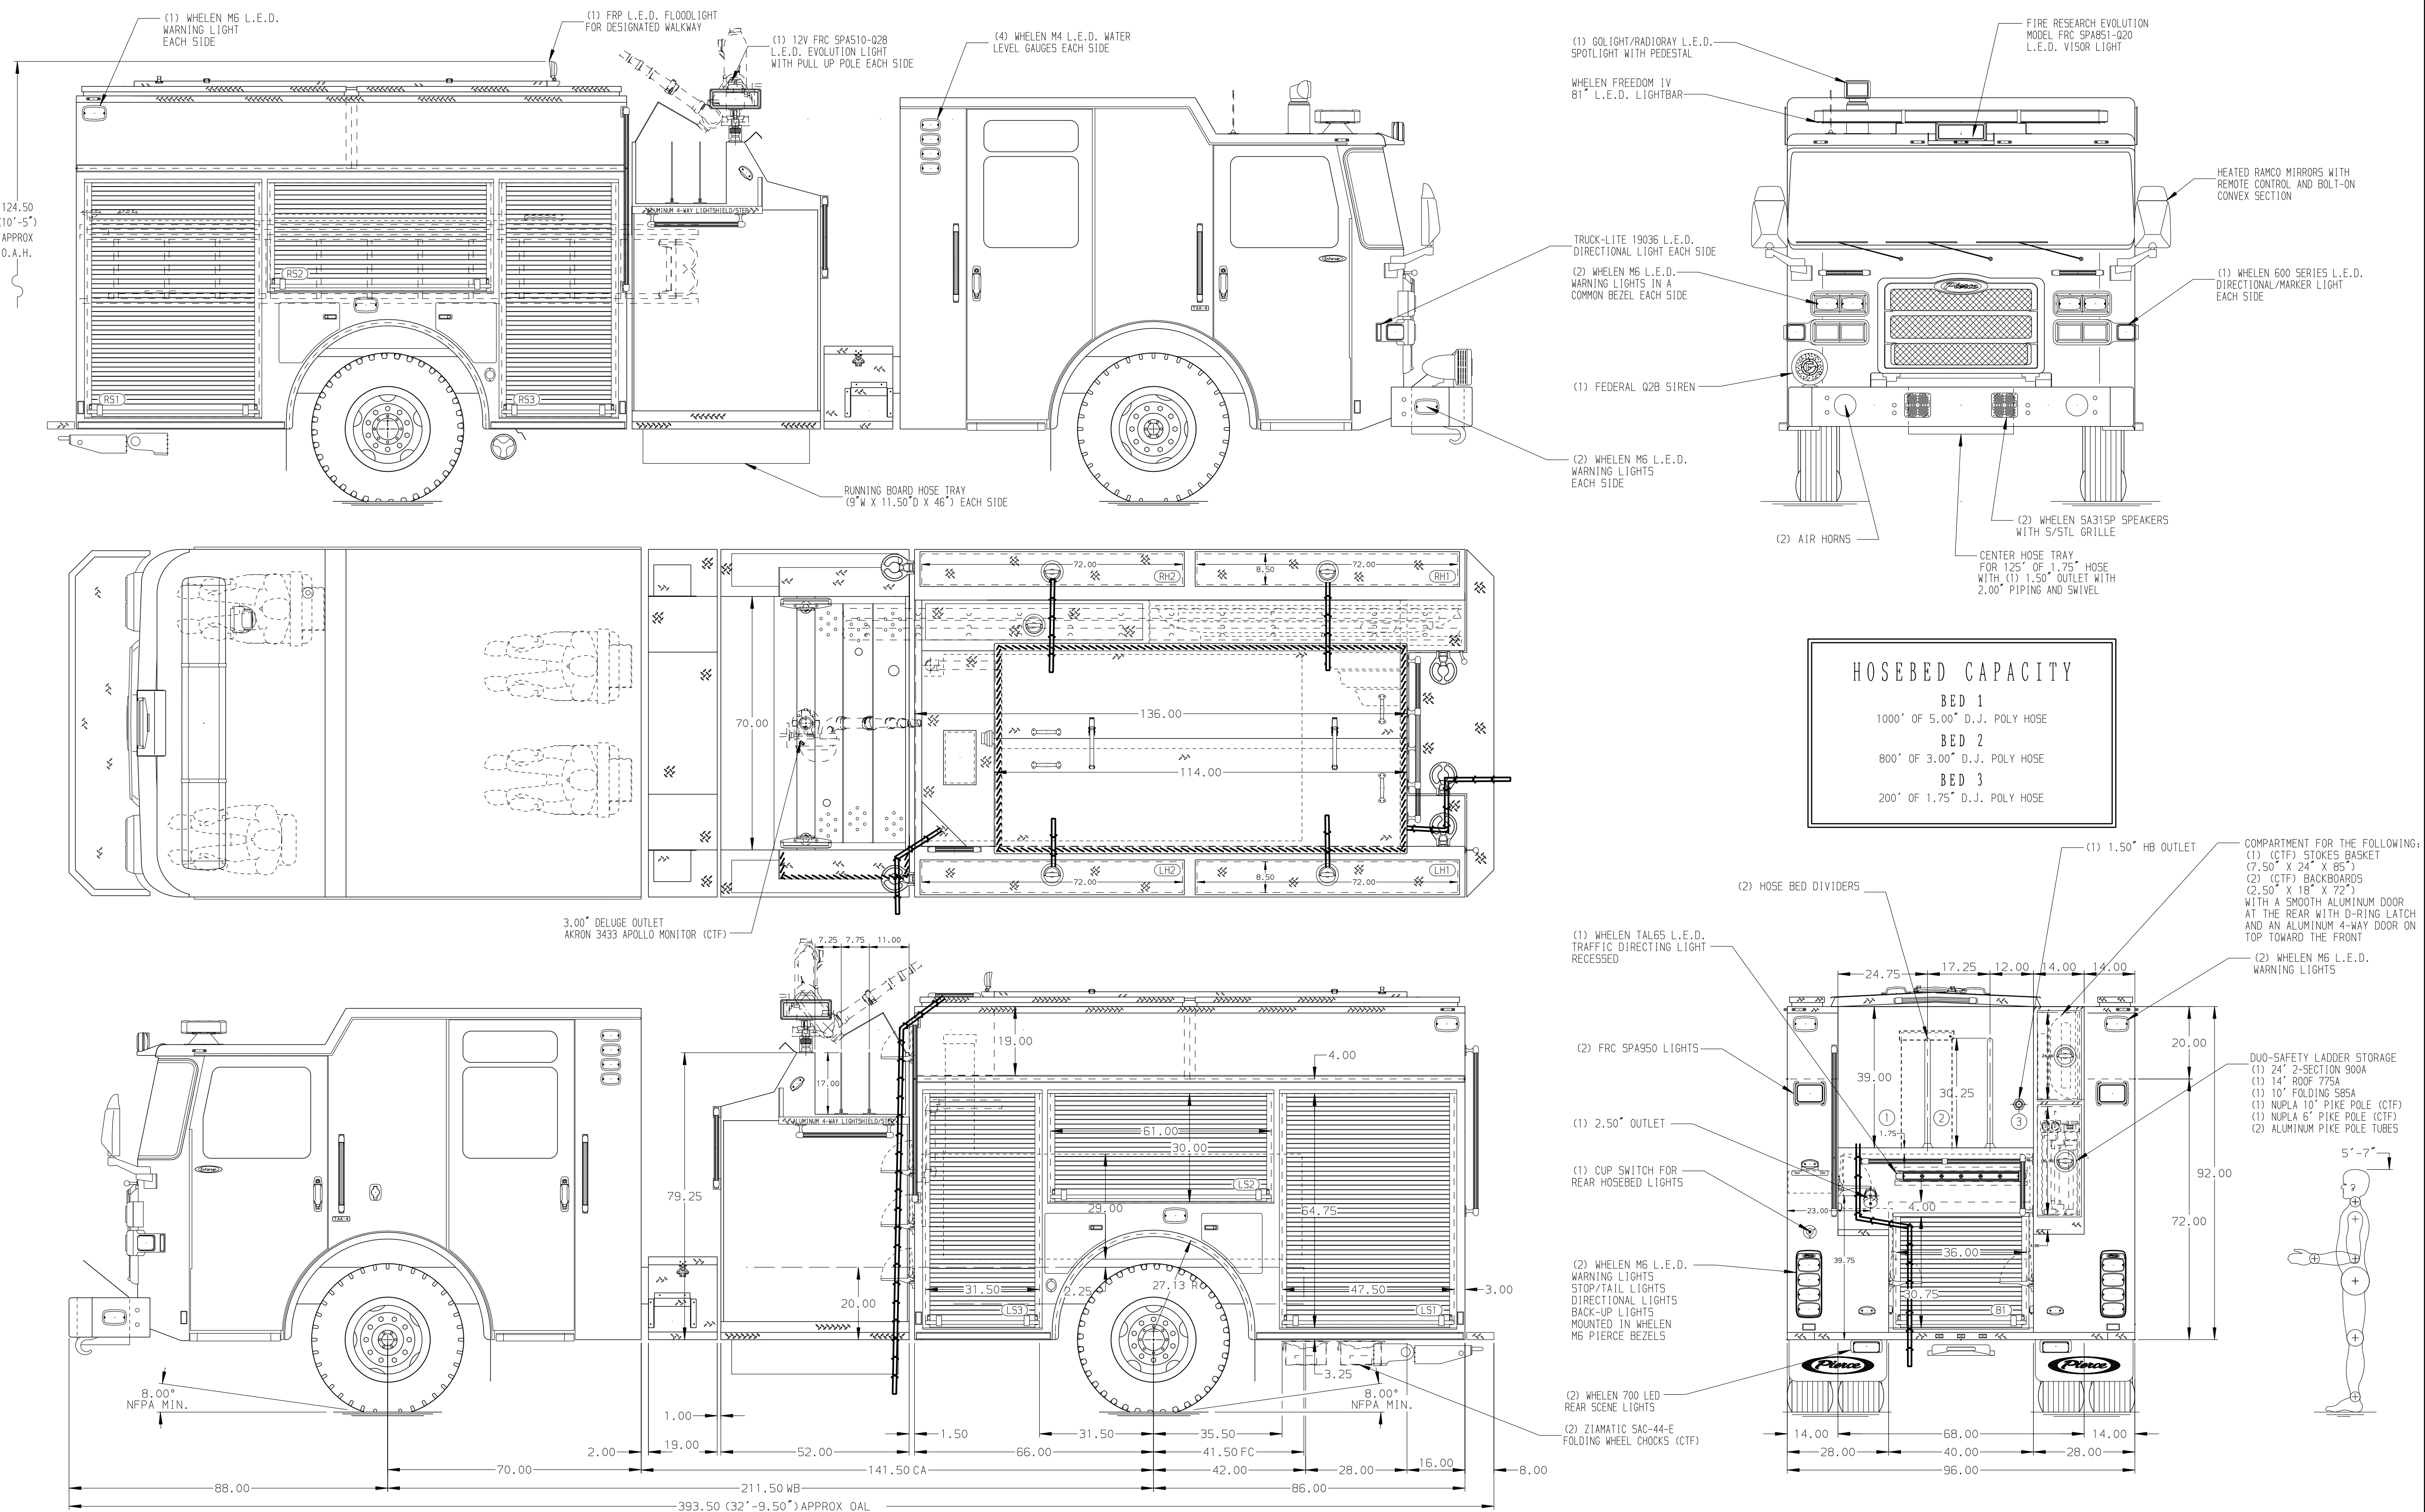

HOSEBED CAPACITY

BED 1	1000' OF 5.00" D.J. POLY HOSE
BED 2	800' OF 3.00" D.J. POLY HOSE
BED 3	200' OF 1.75" D.J. POLY HOSE

				Pierce MANUFACTURING INC.		JOB NO.	39096
						SCALE	DATE
						1:24	
				Pierce Pumper Approval Drawing		DRAWN BY	JAM
				Flowood, MS		CHECKED BY	MMF
						SHEET SIZE	SHEET NO.
				39096AD		D	1 OF 1

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
- NINE ADJUSTABLE SHELVES LOCATED PER ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- TWO SLIDE-OUT TRAY LOCATED PER ORDER
- ONE CTECH CABINET LOCATED PER ORDER
- ONE SLIDE-OUT TOOLBOARD LOCATED PER ORDER
- AIR BAG RACK LOCATED PER ORDER
- POLY TOOLBOX SHIPPED LOOSE