
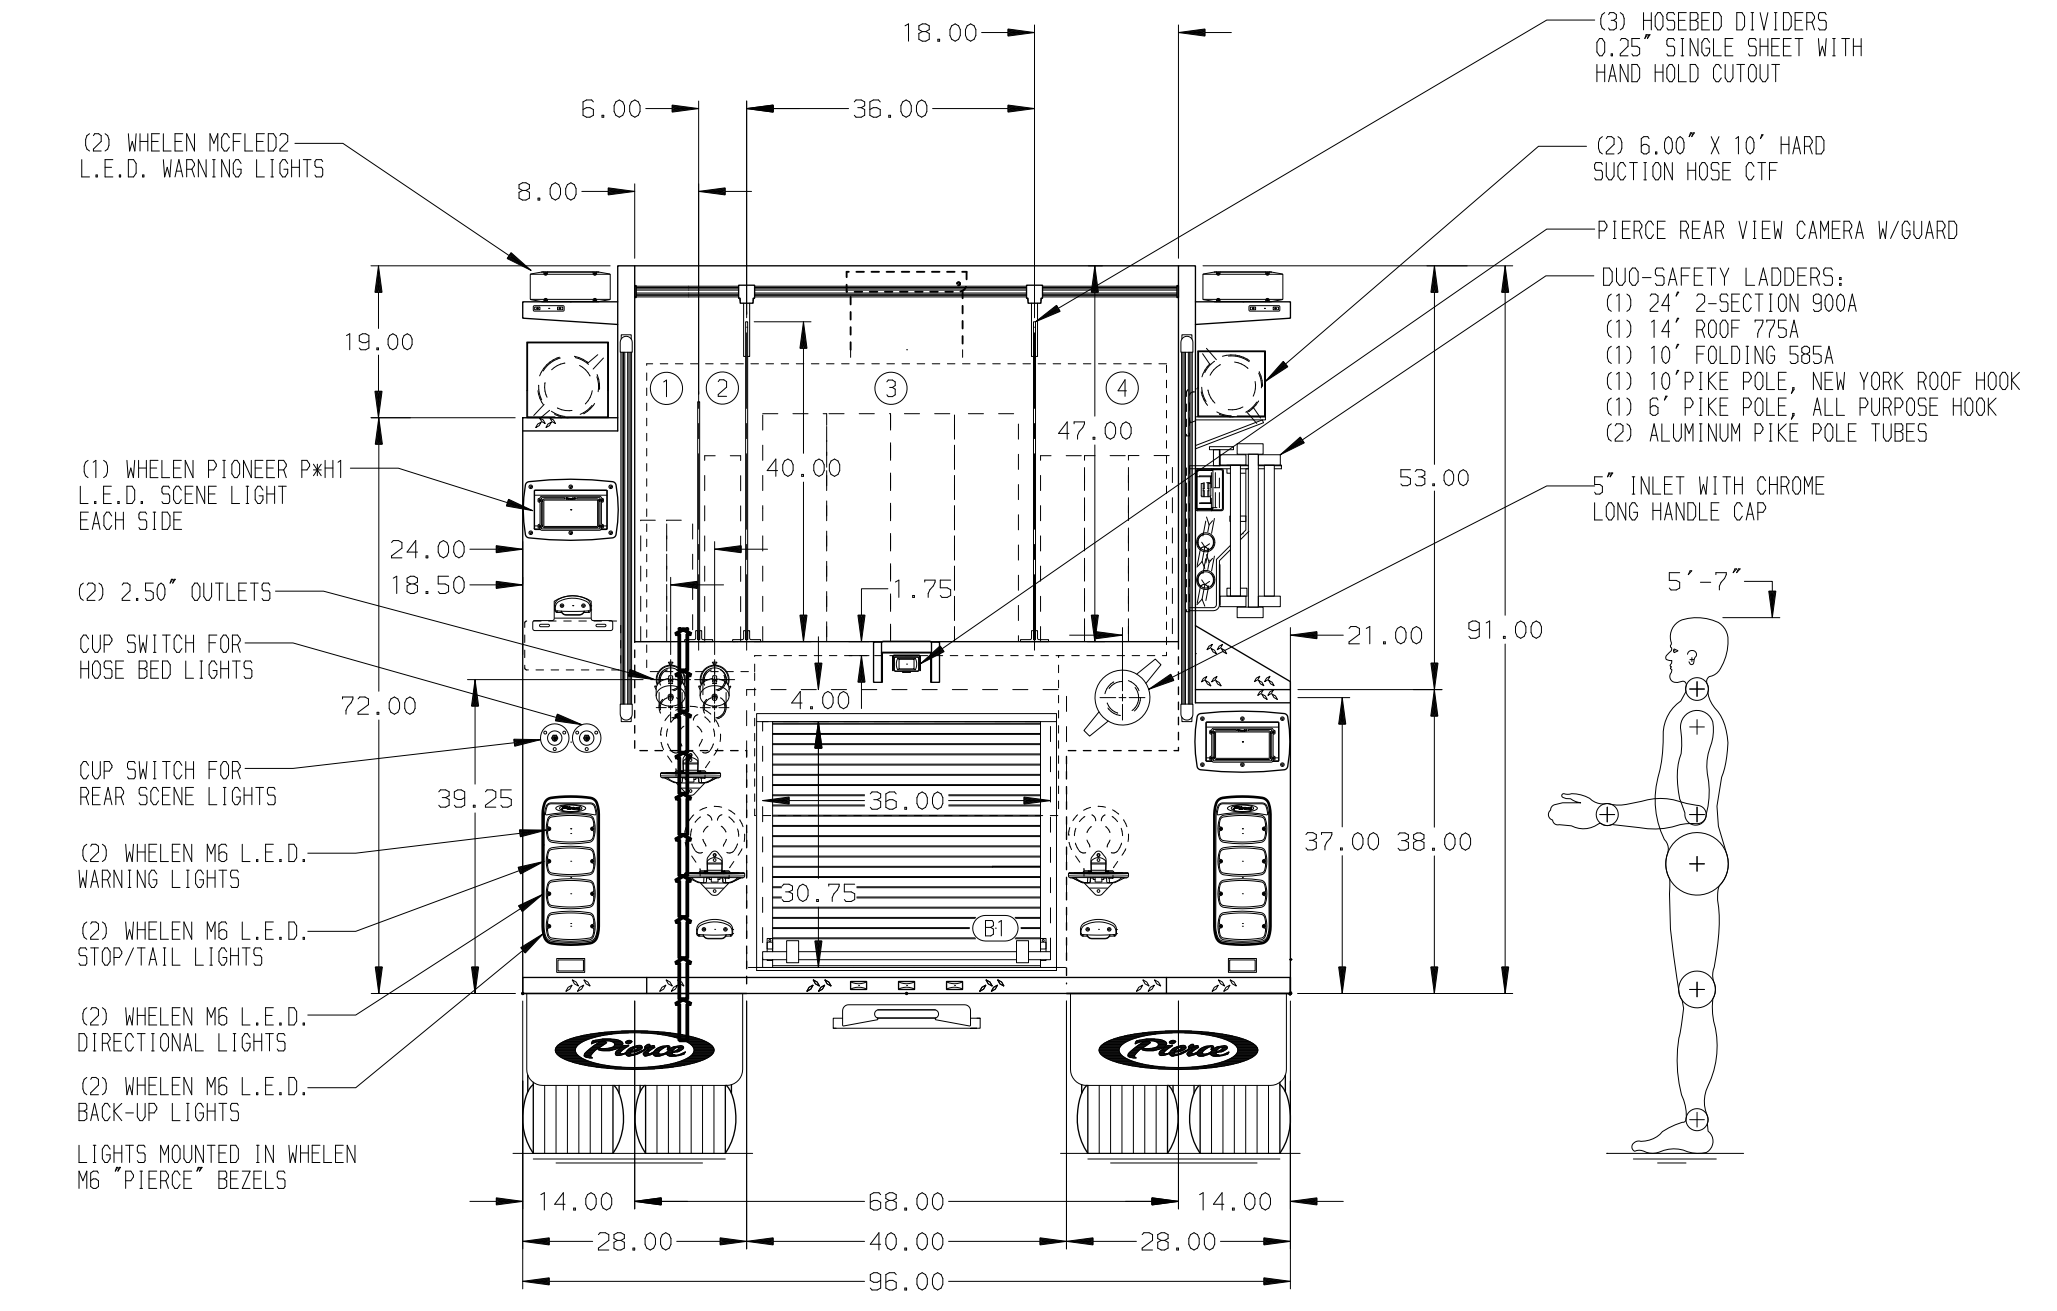


- HOSEBED CAPACITIES**
- ① 300' OF 1.75" D.J. POLY HOSE
  - ② 200' OF 2.50" D.J. POLY HOSE
  - ③ 1500' OF 5.00" ATI JAFLINE COTTON HOSE
  - ④ 600' OF 3.00" D.J. POLY HOSE

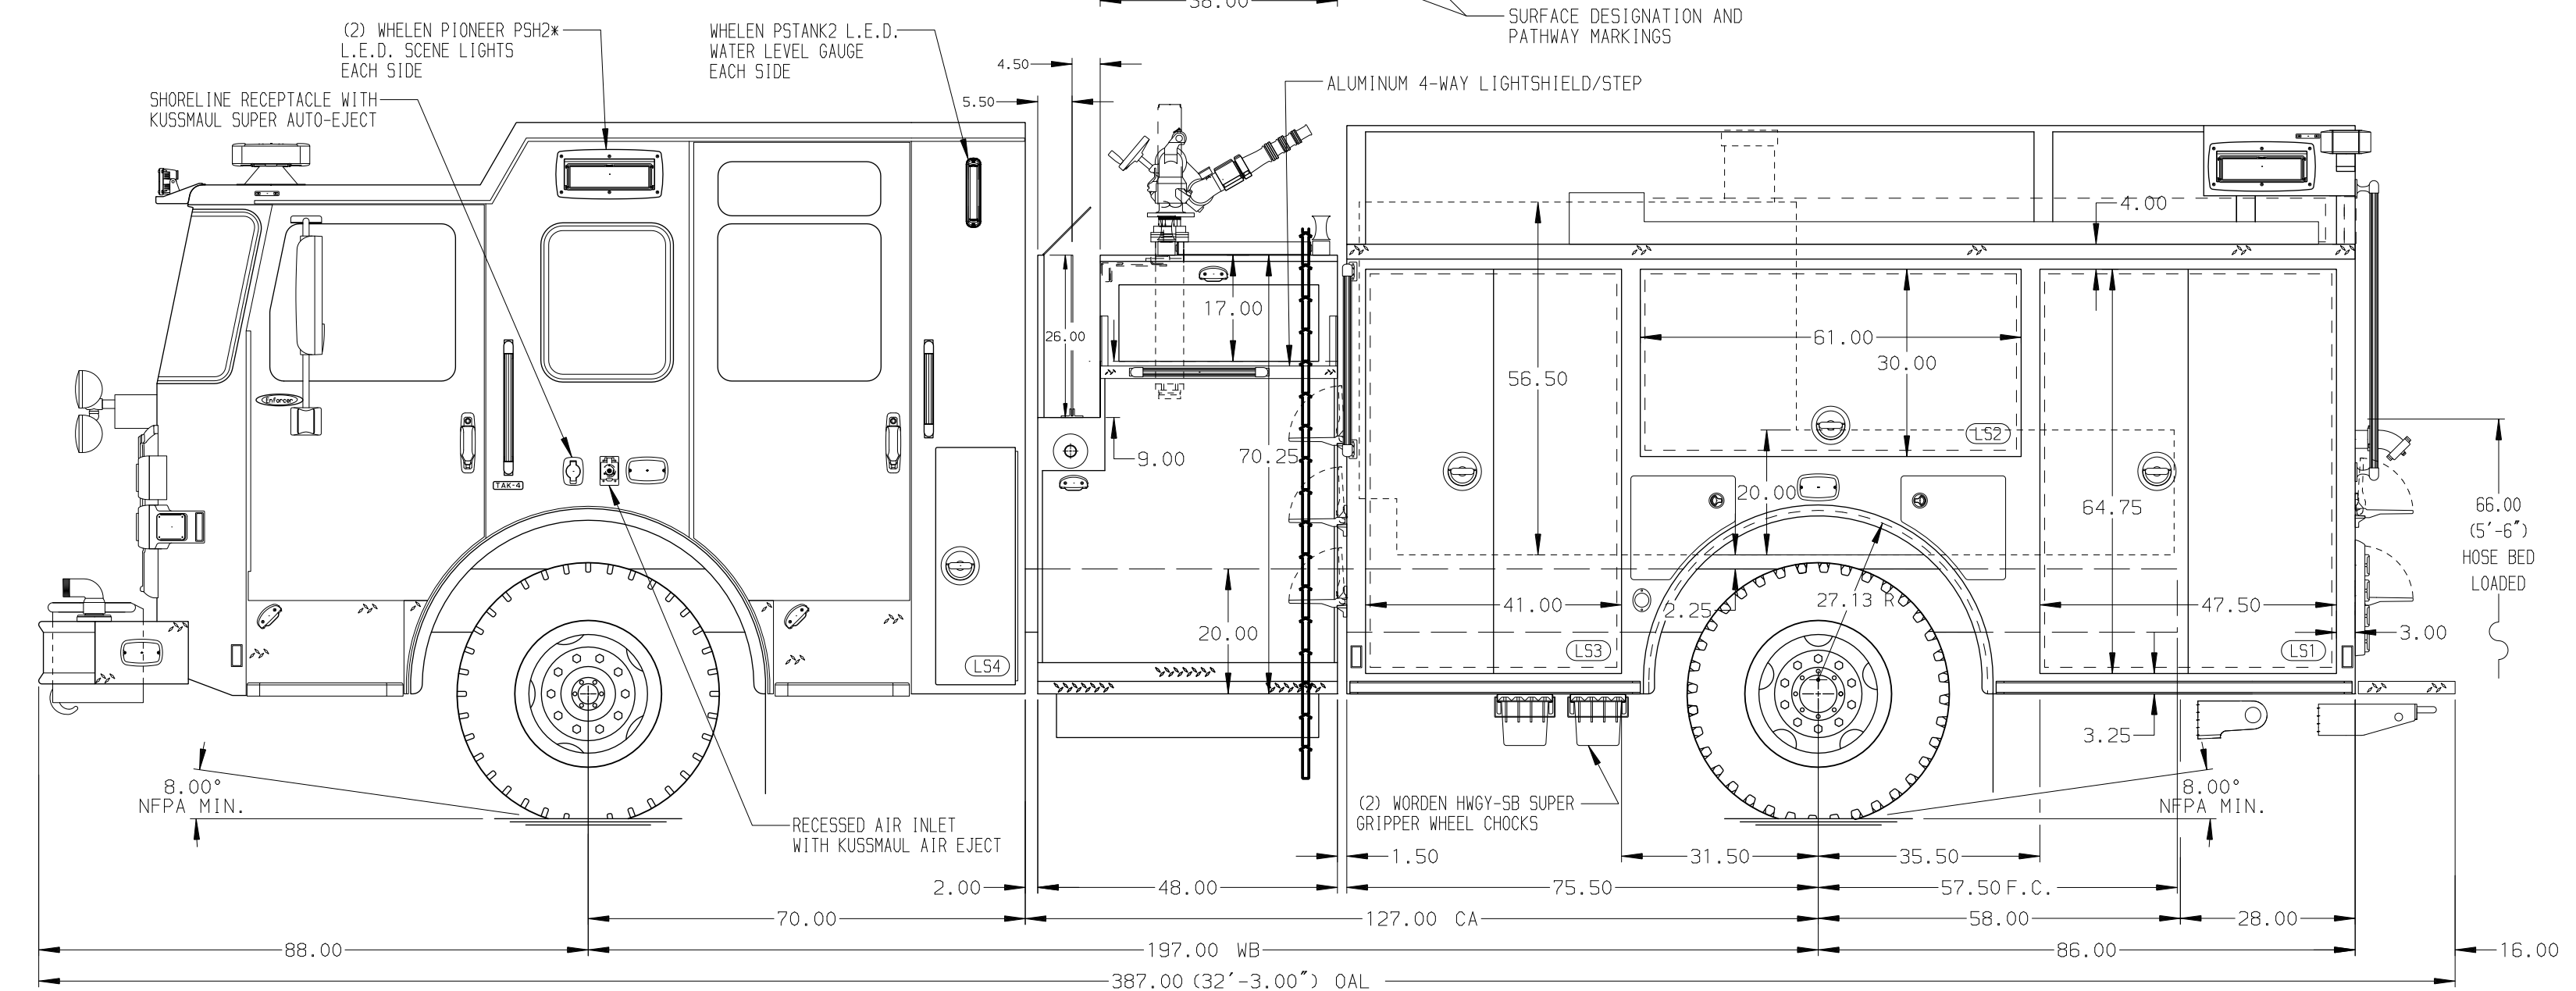

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. KUSSMAUL BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
- 2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER

REV	DATE	BY	CH	ENFORCER
06SEP24	SDR	COS		
26JUL24	AMI	COS		

	TITLE	1500 GPM, 1000G TANK, 1000G WATER 161" PUMPER, HARDWIRED	JOB NO.	39241
	FOR	GOODWILL FIRE COMPANY NO. 1 JACOBUS, PENNSYLVANIA	SCALE	1:24 DATE
DWG NO.	39241AD	CHECKED BY	CDU	08APR24
		SHEET SIZE	D	SHEET NO. 1 OF 1