

# PUMPER BODY

Long Aluminum 2nd Gen Pumper

## CHASSIS

Enforcer Chassis

## CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

## AXLE, REAR

27,000 Lb Dana Axle

## ENGINE

510 HP Paccar MX13 Engine

## TRANSMISSION

Allison 6th Gen, 4000 EVS P

## BUMPER

22" Extended Painted Steel Underslung

## CAB

7010 Enforcer Cab

## BODY

### TOTAL TANK CAPACITY

770 Gallon Poly Tank

### WATER CAPACITY

750 Gallons of Water

### FOAM CELL

20 Gallon Foam Cell, Not Reduced Water

### COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

### COMPT, PUMPER, LEFT SIDE

161" RollUp Full Height Front & Rear FDLR

### COMPT, PUMPER, RIGHT SIDE

161" RollUp Full Height Front & Rear FDLR

## FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

### PUMP

1500 GPM DarLey PSM

### CROSSLAYS, 1.50"

(1) 1.50" Standard Capacity (Pan Style)

### CROSSLAYS, 2.50"

2.50" Crosslay Not Required

### SPEEDLAYS

SpeedLays Not Required

### GENERATOR

Generator Not Required

### FOAM SYSTEM

FoamPro 1600 Single Agent Foam System


## SAFETY

Side Roll and Frontal Impact Protection

### NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- EIGHT ADJUSTABLE SHELVES LOCATED PER ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- ONE CTECH THREE DRAWER ASSEMBLY LOCATED PER ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER ORDER
- TWO MOUNTING PLATES LOCATED PER ORDER

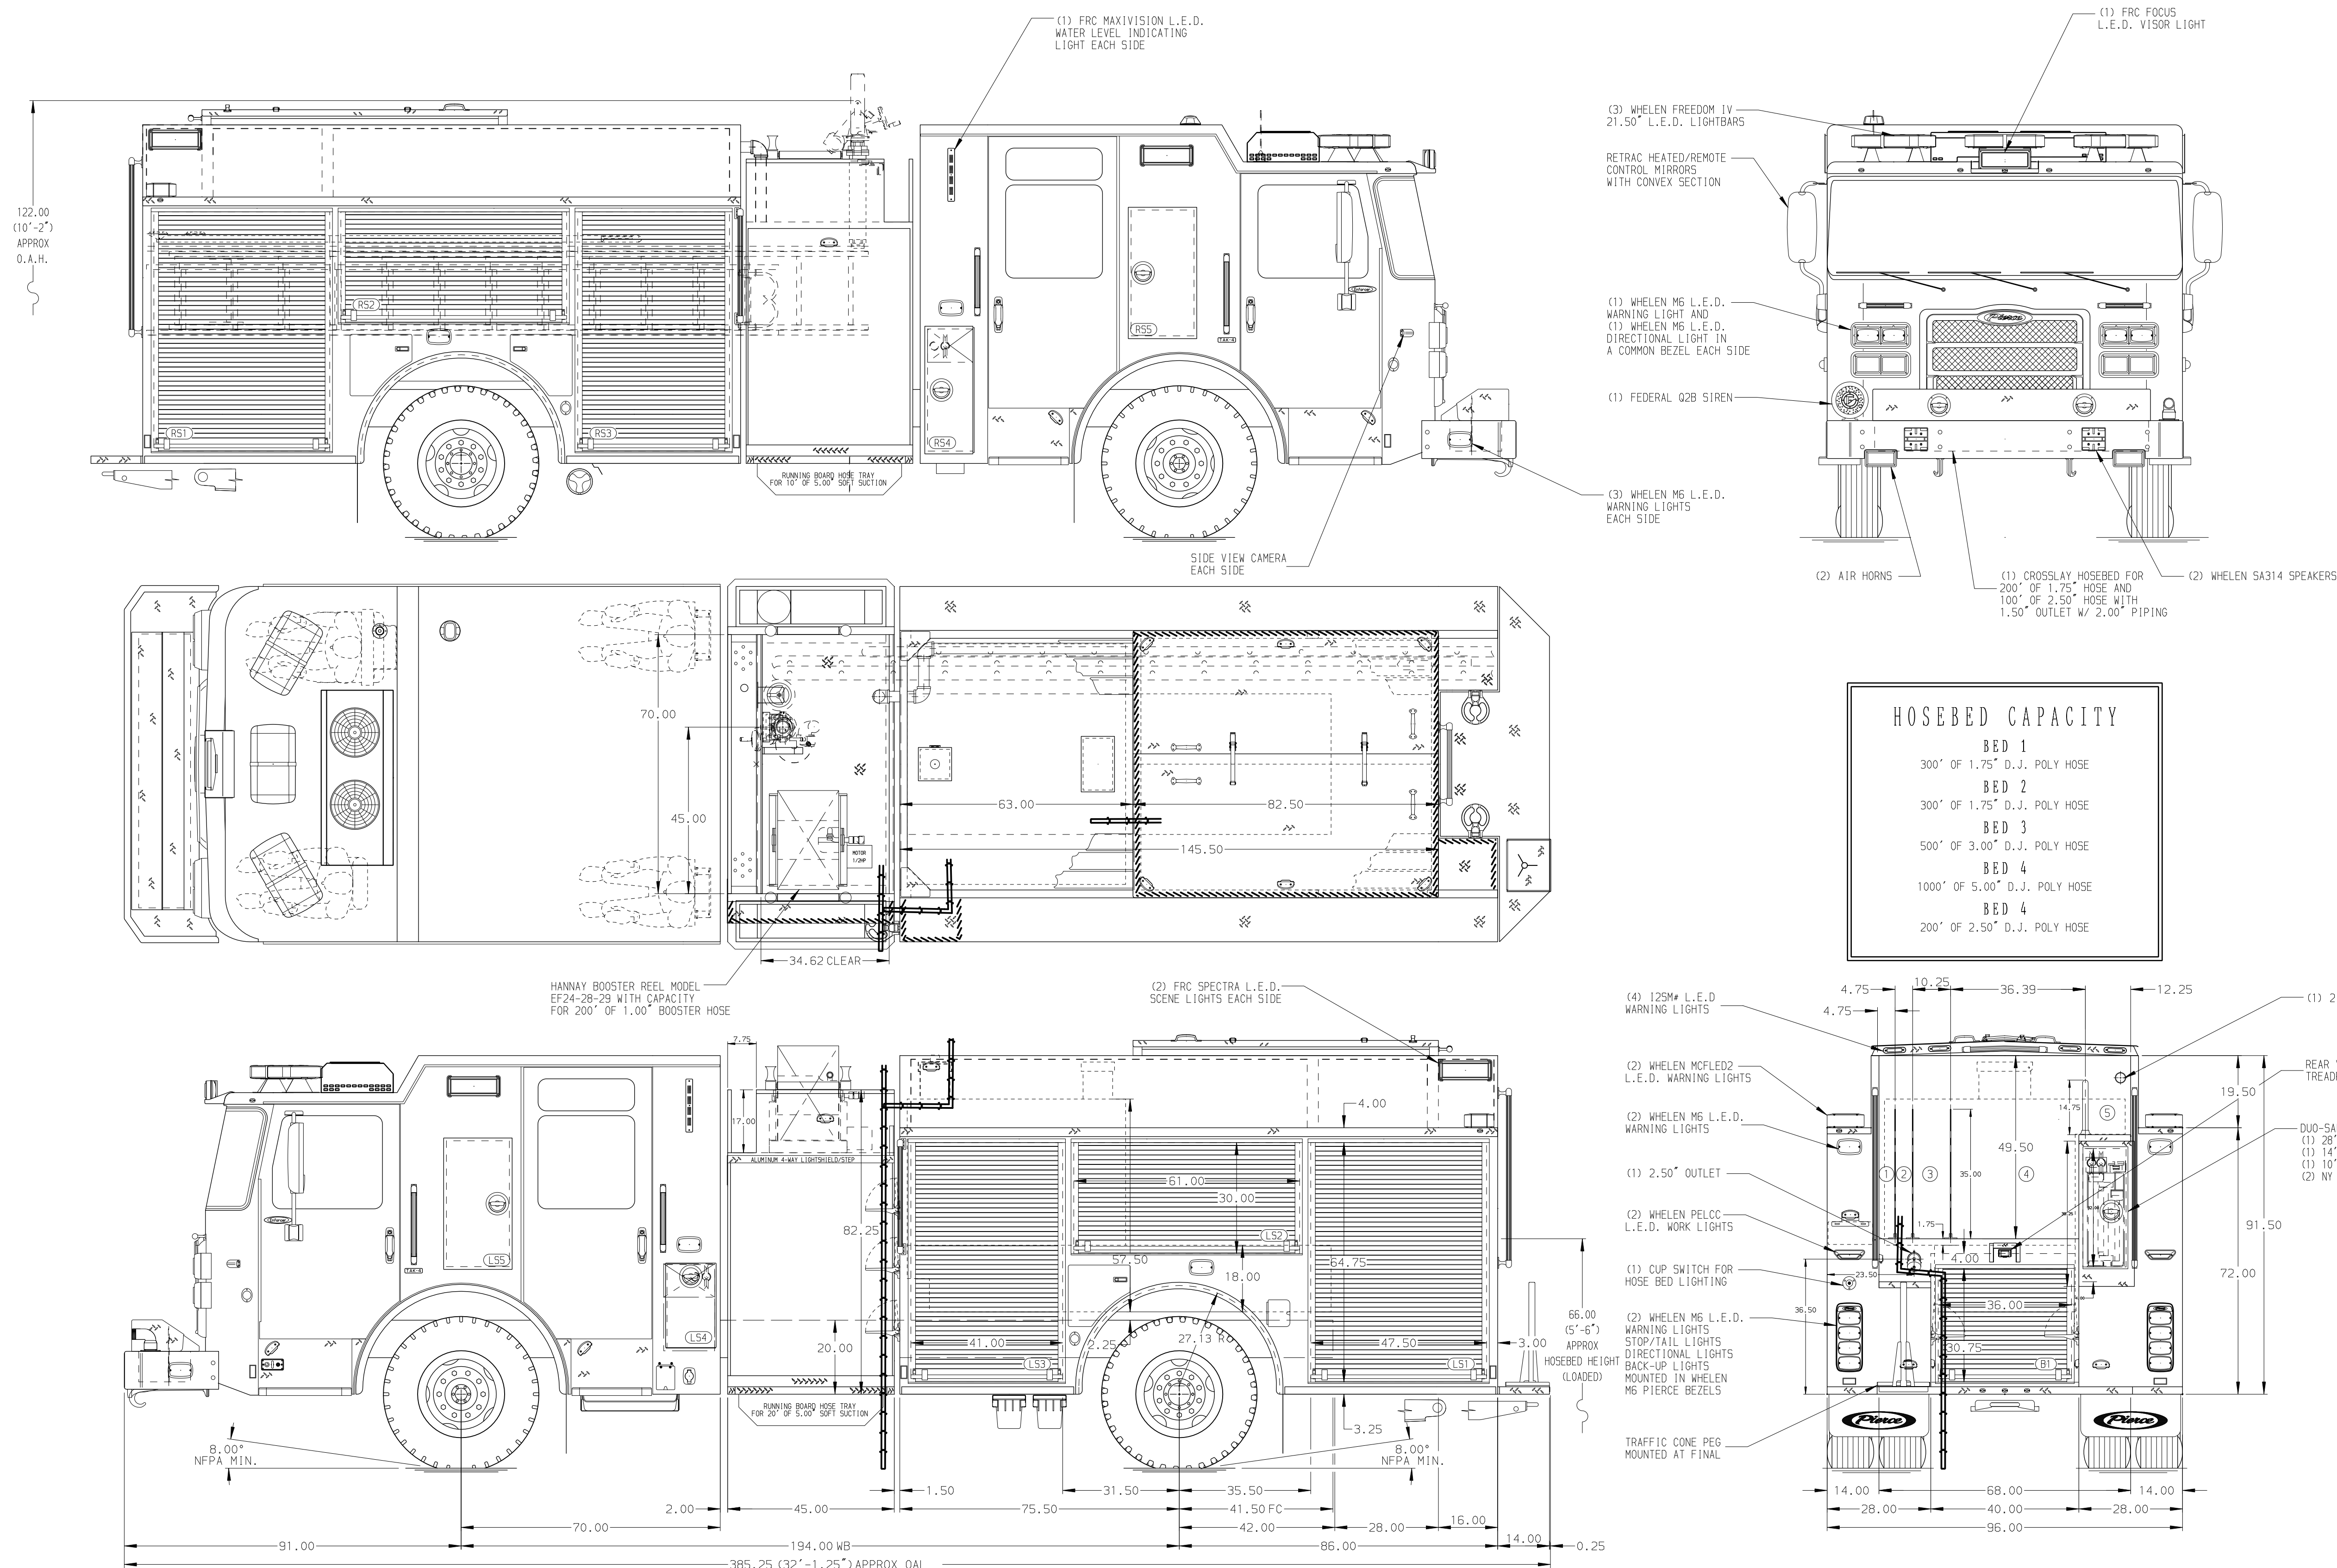

		JOB NO.	40151
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing		
FOR	Weatherford Fire Department		
DWG NO.	40151AD		
REV	DATE	BY	CH
13SEP24	JJB	CHR	PIERCE
12JUL24	JJB	CHR	MODEL
1			ENFORCER
CHECKED BY	MMF	DRAWN BY	JJB
SHEET SIZE	D	SHEET NO.	20FEB24
			20FEB24
			1 OF 1