

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Sober FR Chassis

CHASSIS AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

AXLE, REAR

24,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

Non-Extended Stainless Steel

CAB

6010 Sober FR Cab

BODY TOTAL TANK CAPACITY

500 Gallon Poly Tank

WATER CAPACITY

500 Gallons of Water

FOAM CELL

Foam Cell Not Required

COMPT, PUMPER, REAR

37.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

136" RollUp (2) Upper

COMPT, PUMPER, RIGHT SIDE

136" RollUp Low

FIRE SUPPRESSION PUMPHOUSE

42" Control Zone Top Mount

PUMP

2000 GPM Darley PSM

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Standard Capacity Not Required

SPEEDLAYS

(2) 1.50" & (1) 2.50" Std. Capacity

GENERATOR


Generator Not Required

FOAM SYSTEM

Foam System Not Required

SAFETY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

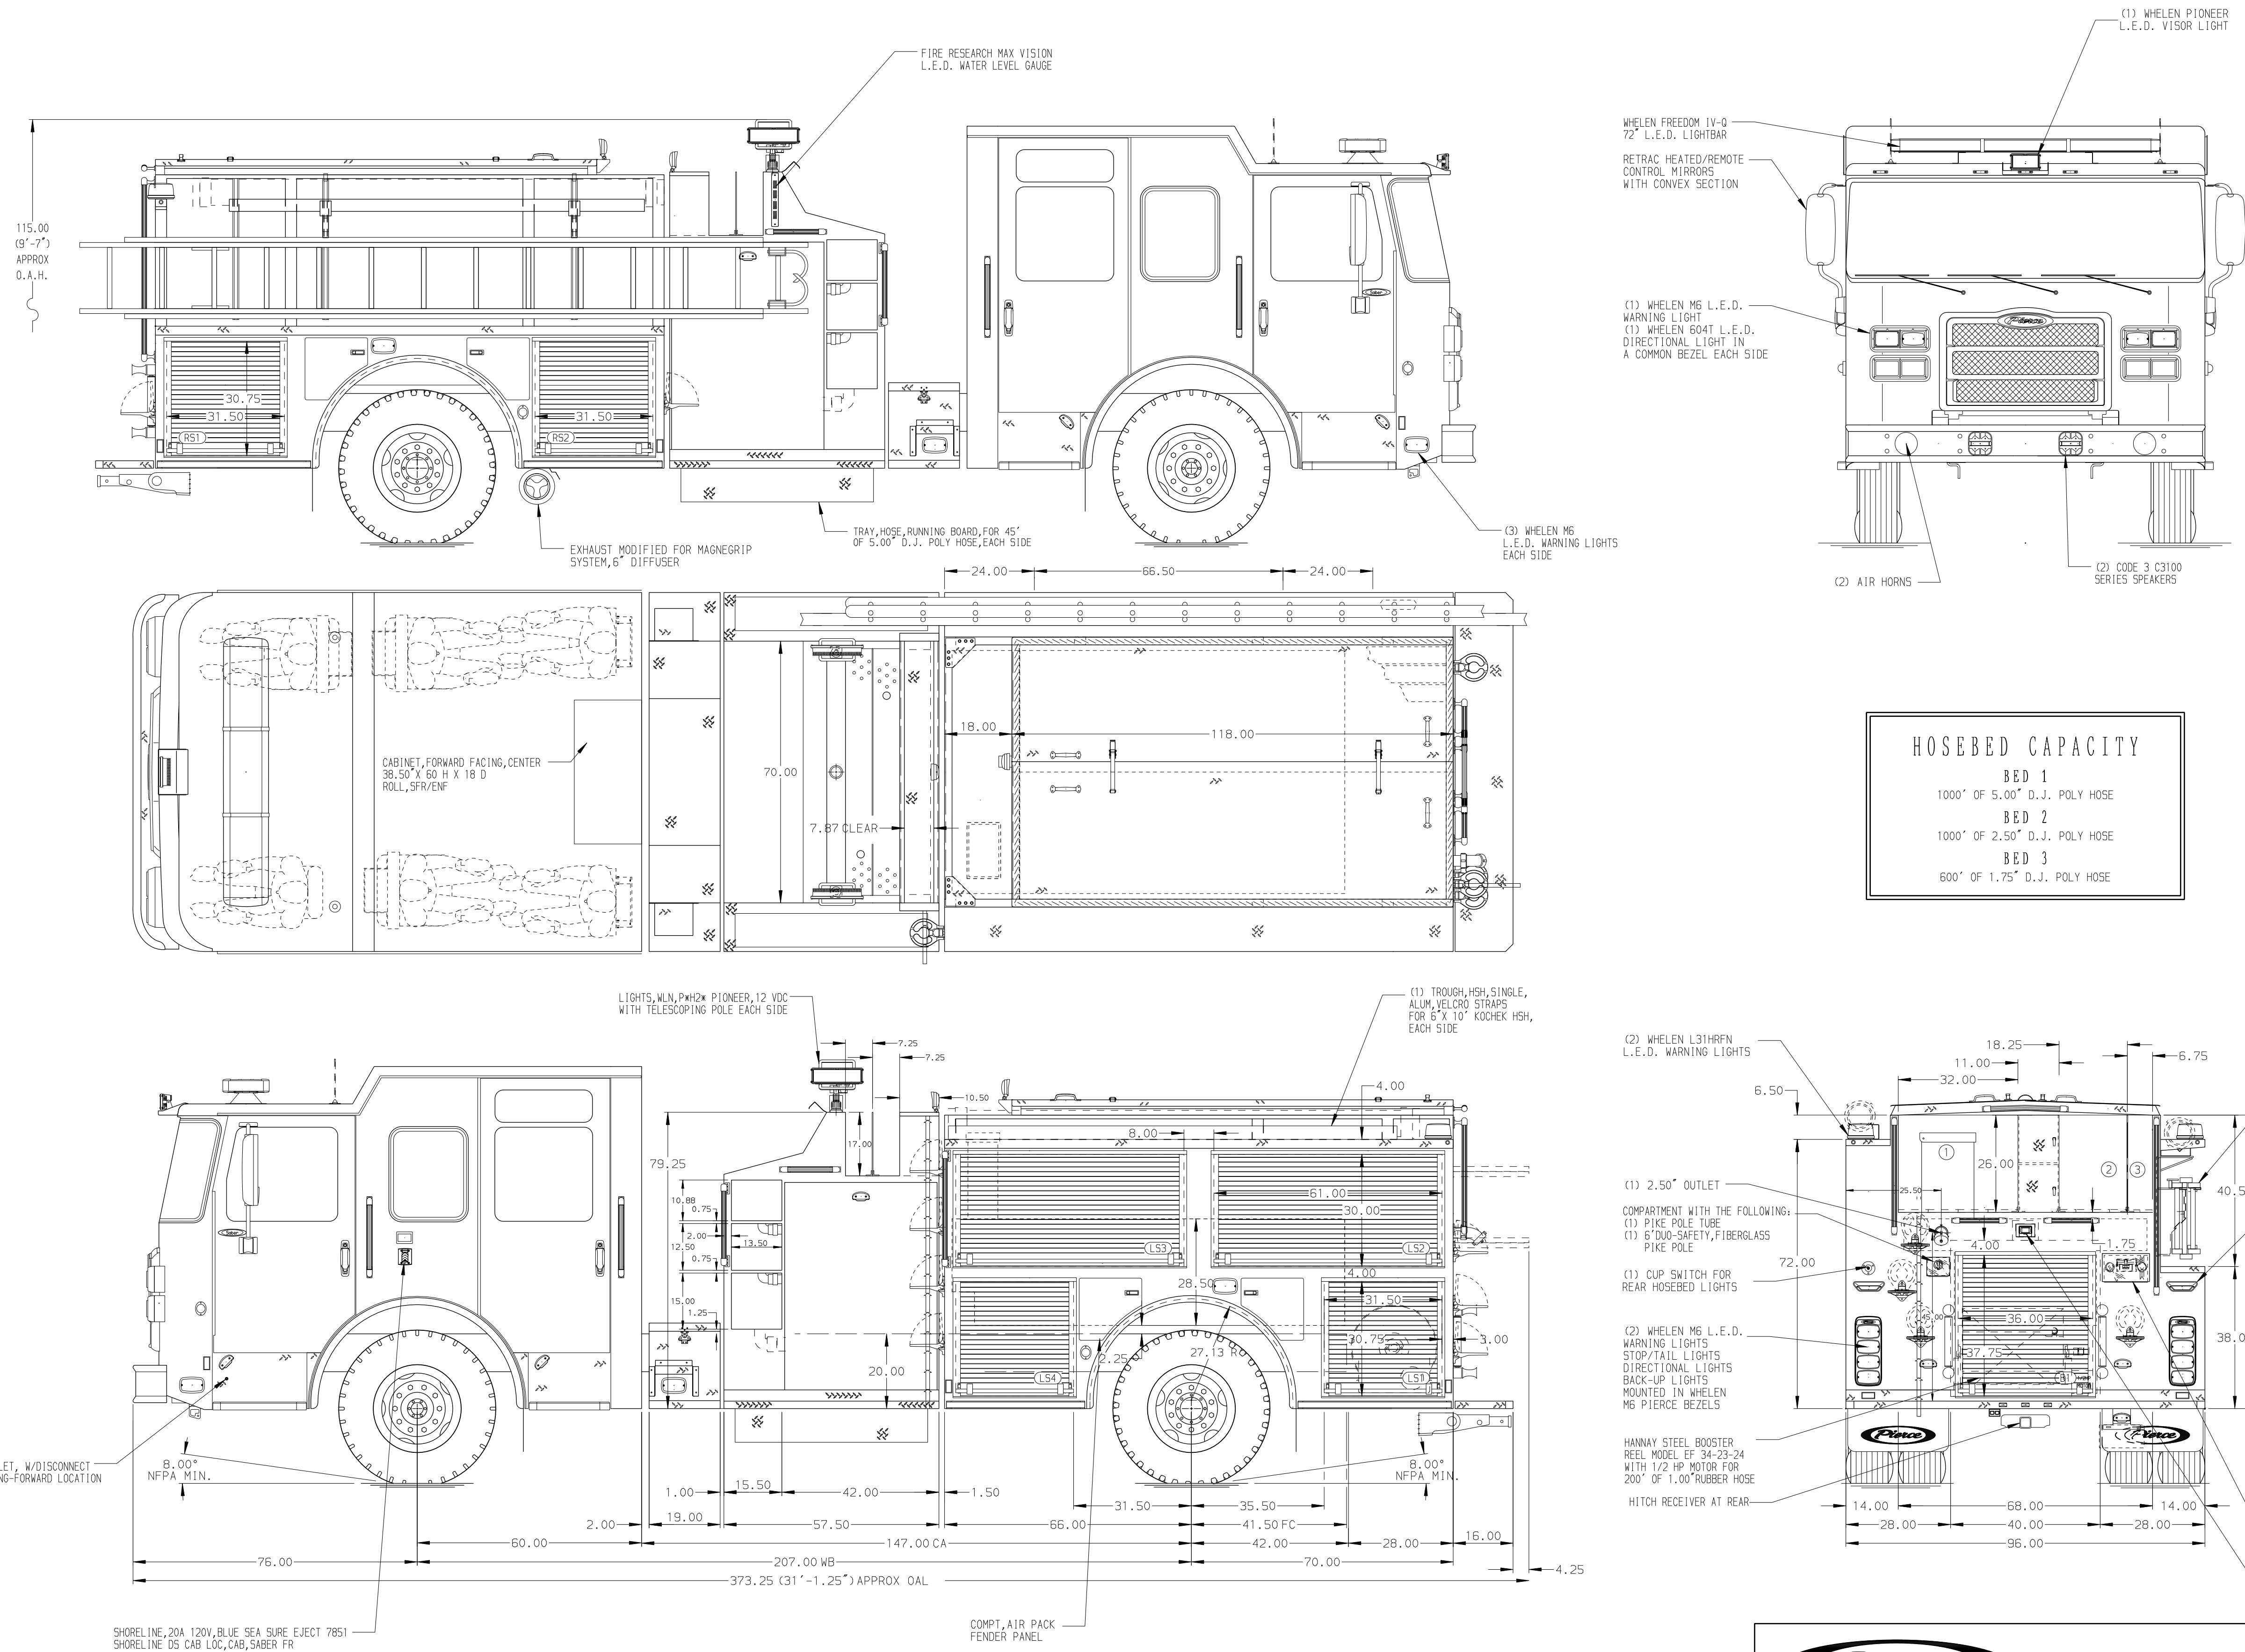

HOSEBED CAPACITY	
BED 1	1000' OF 5.00" D.J. POLY HOSE
BED 2	1000' OF 2.50" D.J. POLY HOSE
BED 3	600' OF 1.75" D.J. POLY HOSE

		JOB NO.	40632
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	JAM 01DEC23
FOR	Akron Fire Department	CHECKED BY	MMF 06DEC23
DWG NO.	40632AD-SH1	SHEET SIZE	SHEET NO.
		D	1 OF 1

REV	DATE	BY	CH	SABER FR
10MAY24	RWR	CCS		
23FEB24	WHO	CCS		