PUMPER BODY

Short Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM 18,000 lb Dana Axle

AXLE, REAR

24,000 lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

16" Extended Painted Steel

CAB

7000 Enforcer Cab

BODY WATER TANK

750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE

140" Lap Full Height Front & Rear Double Door Over Wheel, FDLER

COMPT, PUMPER, RIGHT SIDE 140" Lap Low FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50" (2) 1.50" Standard Capacity

CROSSLAYS, 2.50" 2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required GENERATOR


Generator Not Required

Foam System Foam System Not Required

Foam Cell Foam Cell Not Required

AS MAY OCCUR OR BE NECESSARY IN

MINOR DETAILS NOT SHOWN.

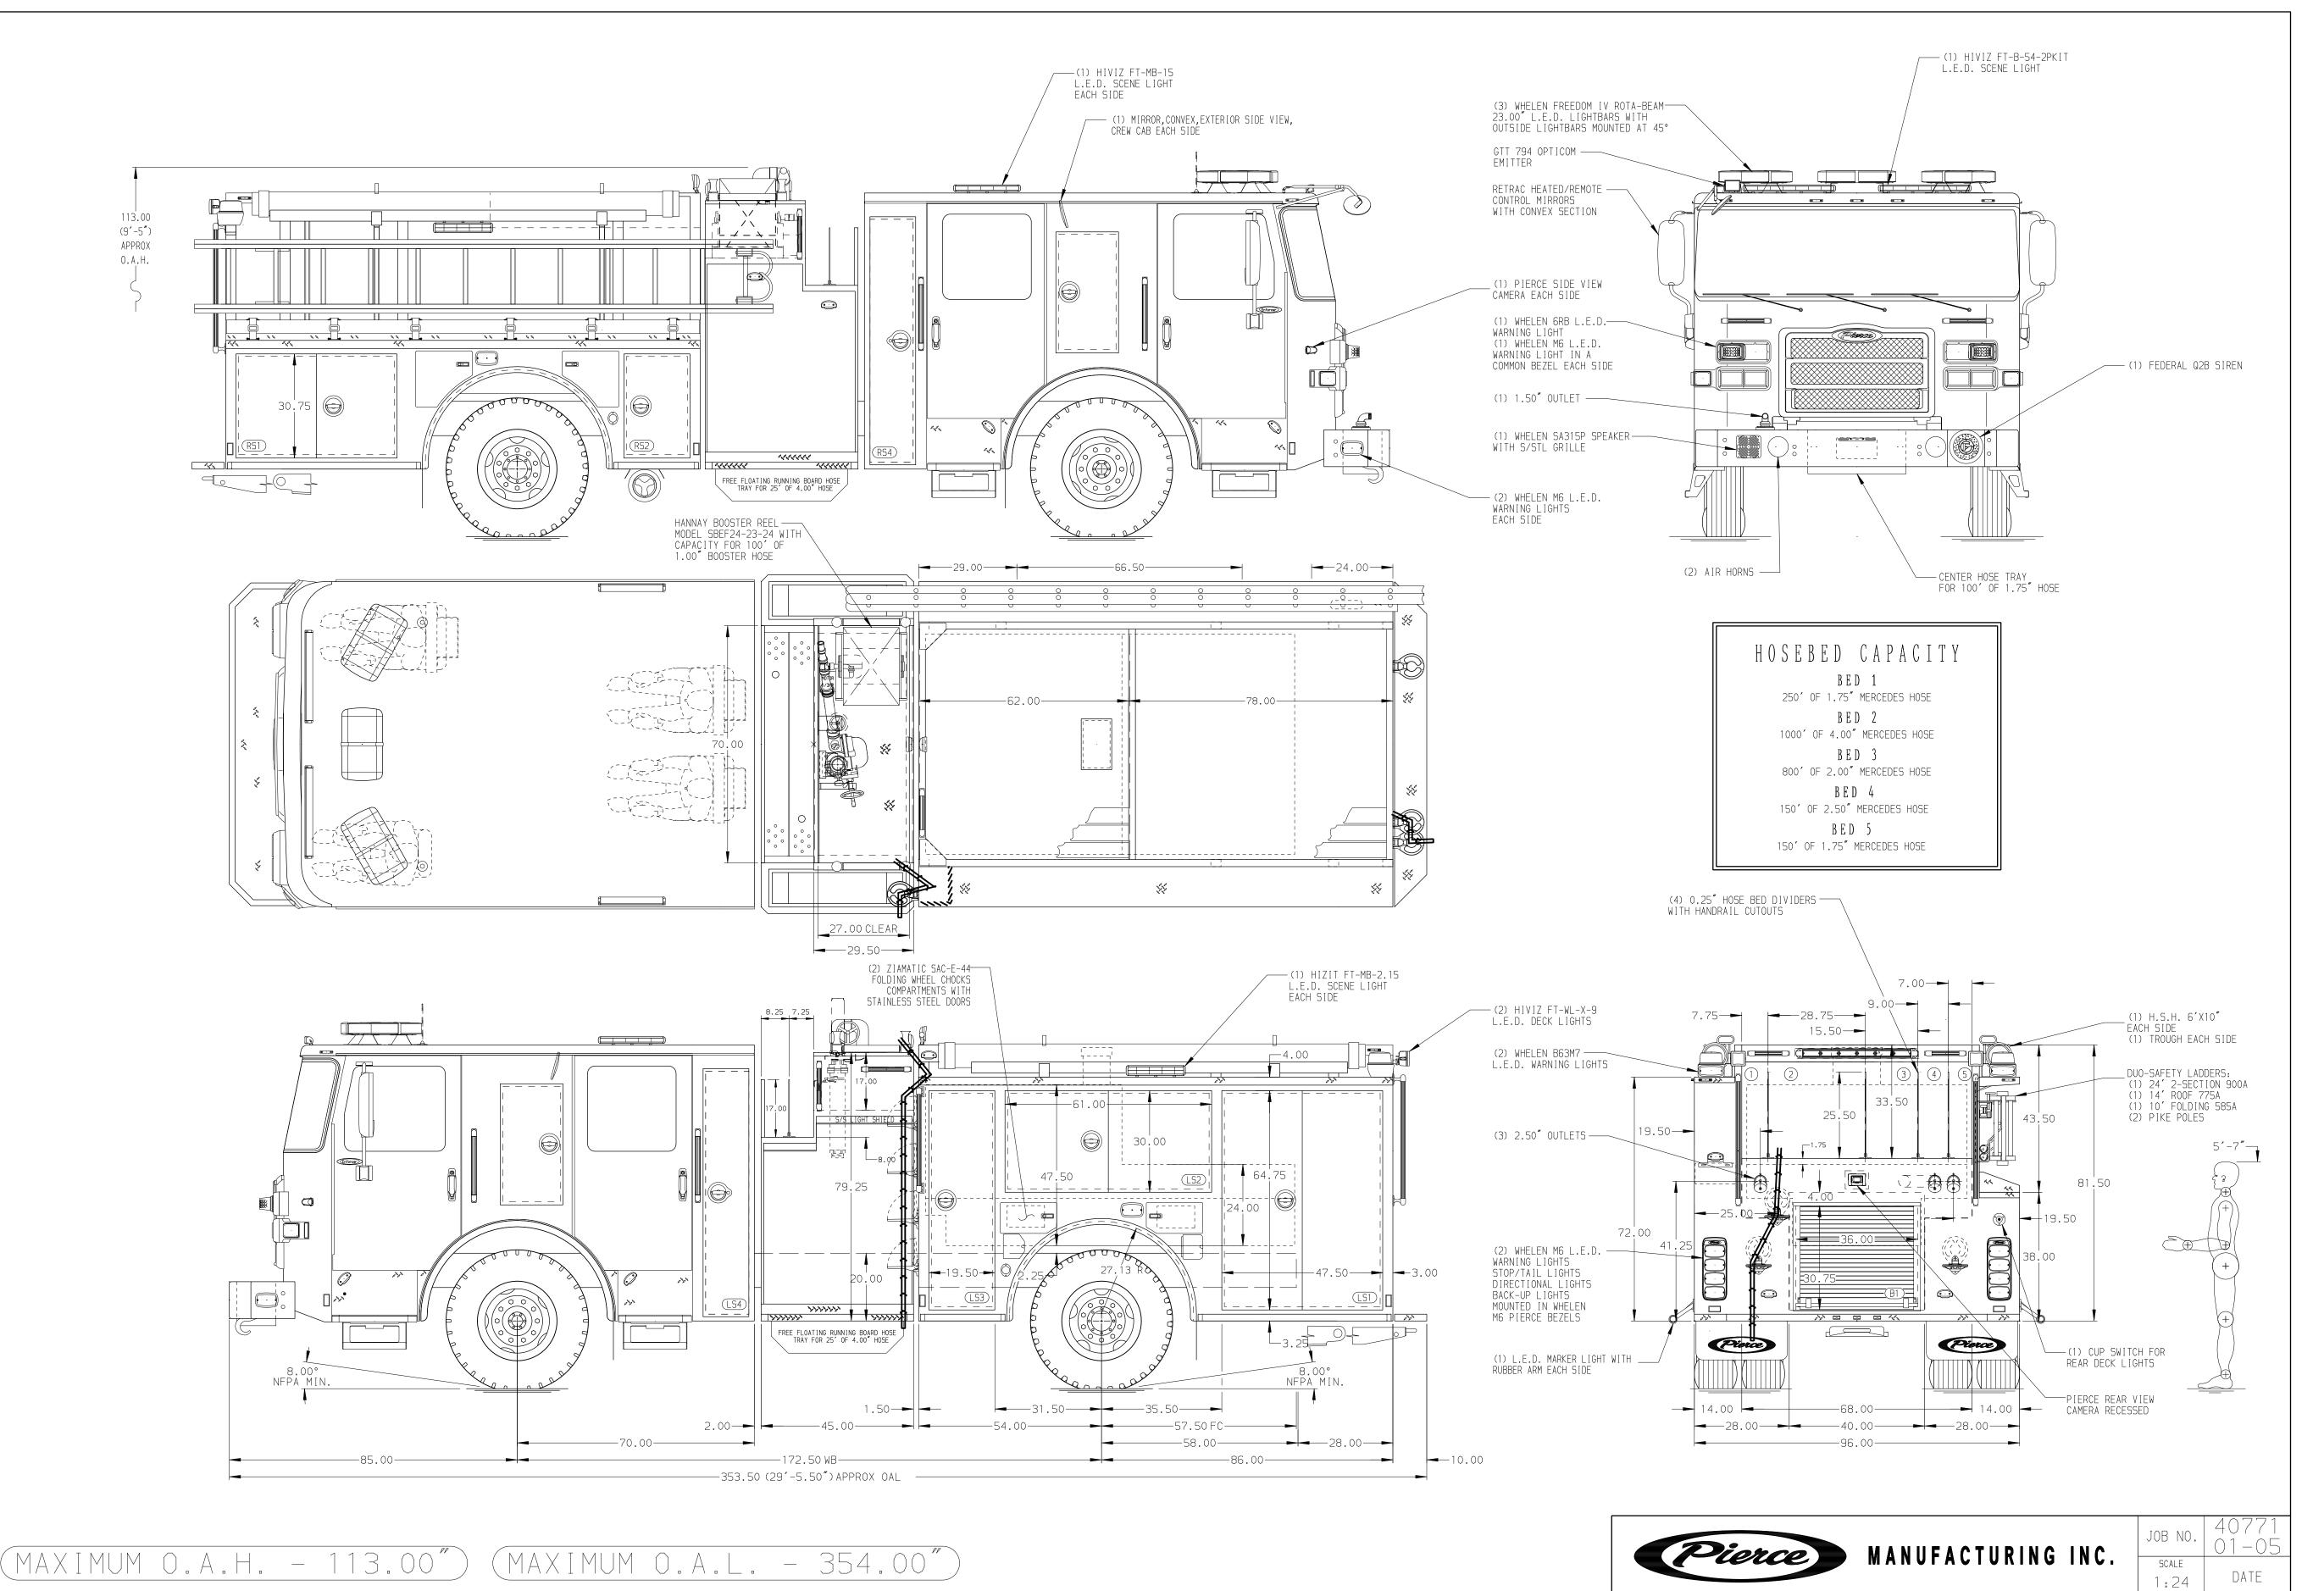

Frontal Impact Protection

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT SIDE 2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE SEAT RISER . AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL BATTERY CHARGER LOCATED PER ORDER DIMENSIONS SHOWN ARE APPROXIMATE

AND ARE SUBJECT TO MINOR DEVIATIONS BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
TWO ADJUSTABLE SHELVES LOCATED PER ORDER
THREE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER ONE CTECH THREE DRAWER ASSEMBLY LOCATED PER ORDER . AUTOMATIC TIRE CHAINS

10. TWO HANGER POSTS LOCATED PER ORDER

11. PEGBOARD ON SIDE WALL IN COMPARTMENTS LOCATED PER SHOP ORDER 12. PEGBOARD ON BACK WALL IN COMPARTMENT LOCATED PER SHOP ORDER
13. ONE RECEPTACLE STRIP LOCATED PER SHOP ORDER

DRAWN BY CHASSIS DATA Pierce Pumper Approval Drawing 25JUL23 WRE MAKE CHECKED BY 7 21AUG24 MMF JLL Lowell Fire Department 28JUL23 MMF B/ | 25JUN24 | MMF | JLL PIERCE MODEL SHEET SIZE SHEET NO. A 25APR24 MMF JLL 40771AD REV DATE BY CH

CONSTRUCTION.