

# PUMPER BODY

Long Aluminum 2nd Gen Pumper

## CHASSIS

Enforcer Chassis

## CHASSIS AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

## AXLE, REAR

24,000 Lb Dana Axle

## ENGINE

450 HP Cummins L9 Engine

## TRANSMISSION

Allison 6th Gen, 3000 EVS P

## BUMPER

19" Extended Painted Steel

## CAB

7000 Enforcer Cab

## BODY TOTAL TANK CAPACITY

750 Gallon New York Style Poly Tank

## WATER CAPACITY

750 Gallons of Water

## FOAM CELL

Foam Cell Not Required

## COMPT, PUMPER, REAR

30.75" FF Lap Rear Compt

## COMPT, PUMPER, LEFT SIDE

161" Lap Full Height Front & Rear FDLER

## COMPT, PUMPER, RIGHT SIDE

161" Lap Low FDLER

## FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

## PUMP

1500 GPM Hale QMAX

## CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

## CROSSLAYS, 2.50"

2.50" Crosslay Not Required

## SPEEDLAYS

SpeedLays Not Required

## GENERATOR

Generator Not Required

## FOAM SYSTEM


Foam System Not Required

## SAFETY

Side Roll and Frontal Impact Protection

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CREW CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- SEVEN ADJUSTABLE SHELVES LOCATED PER ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER

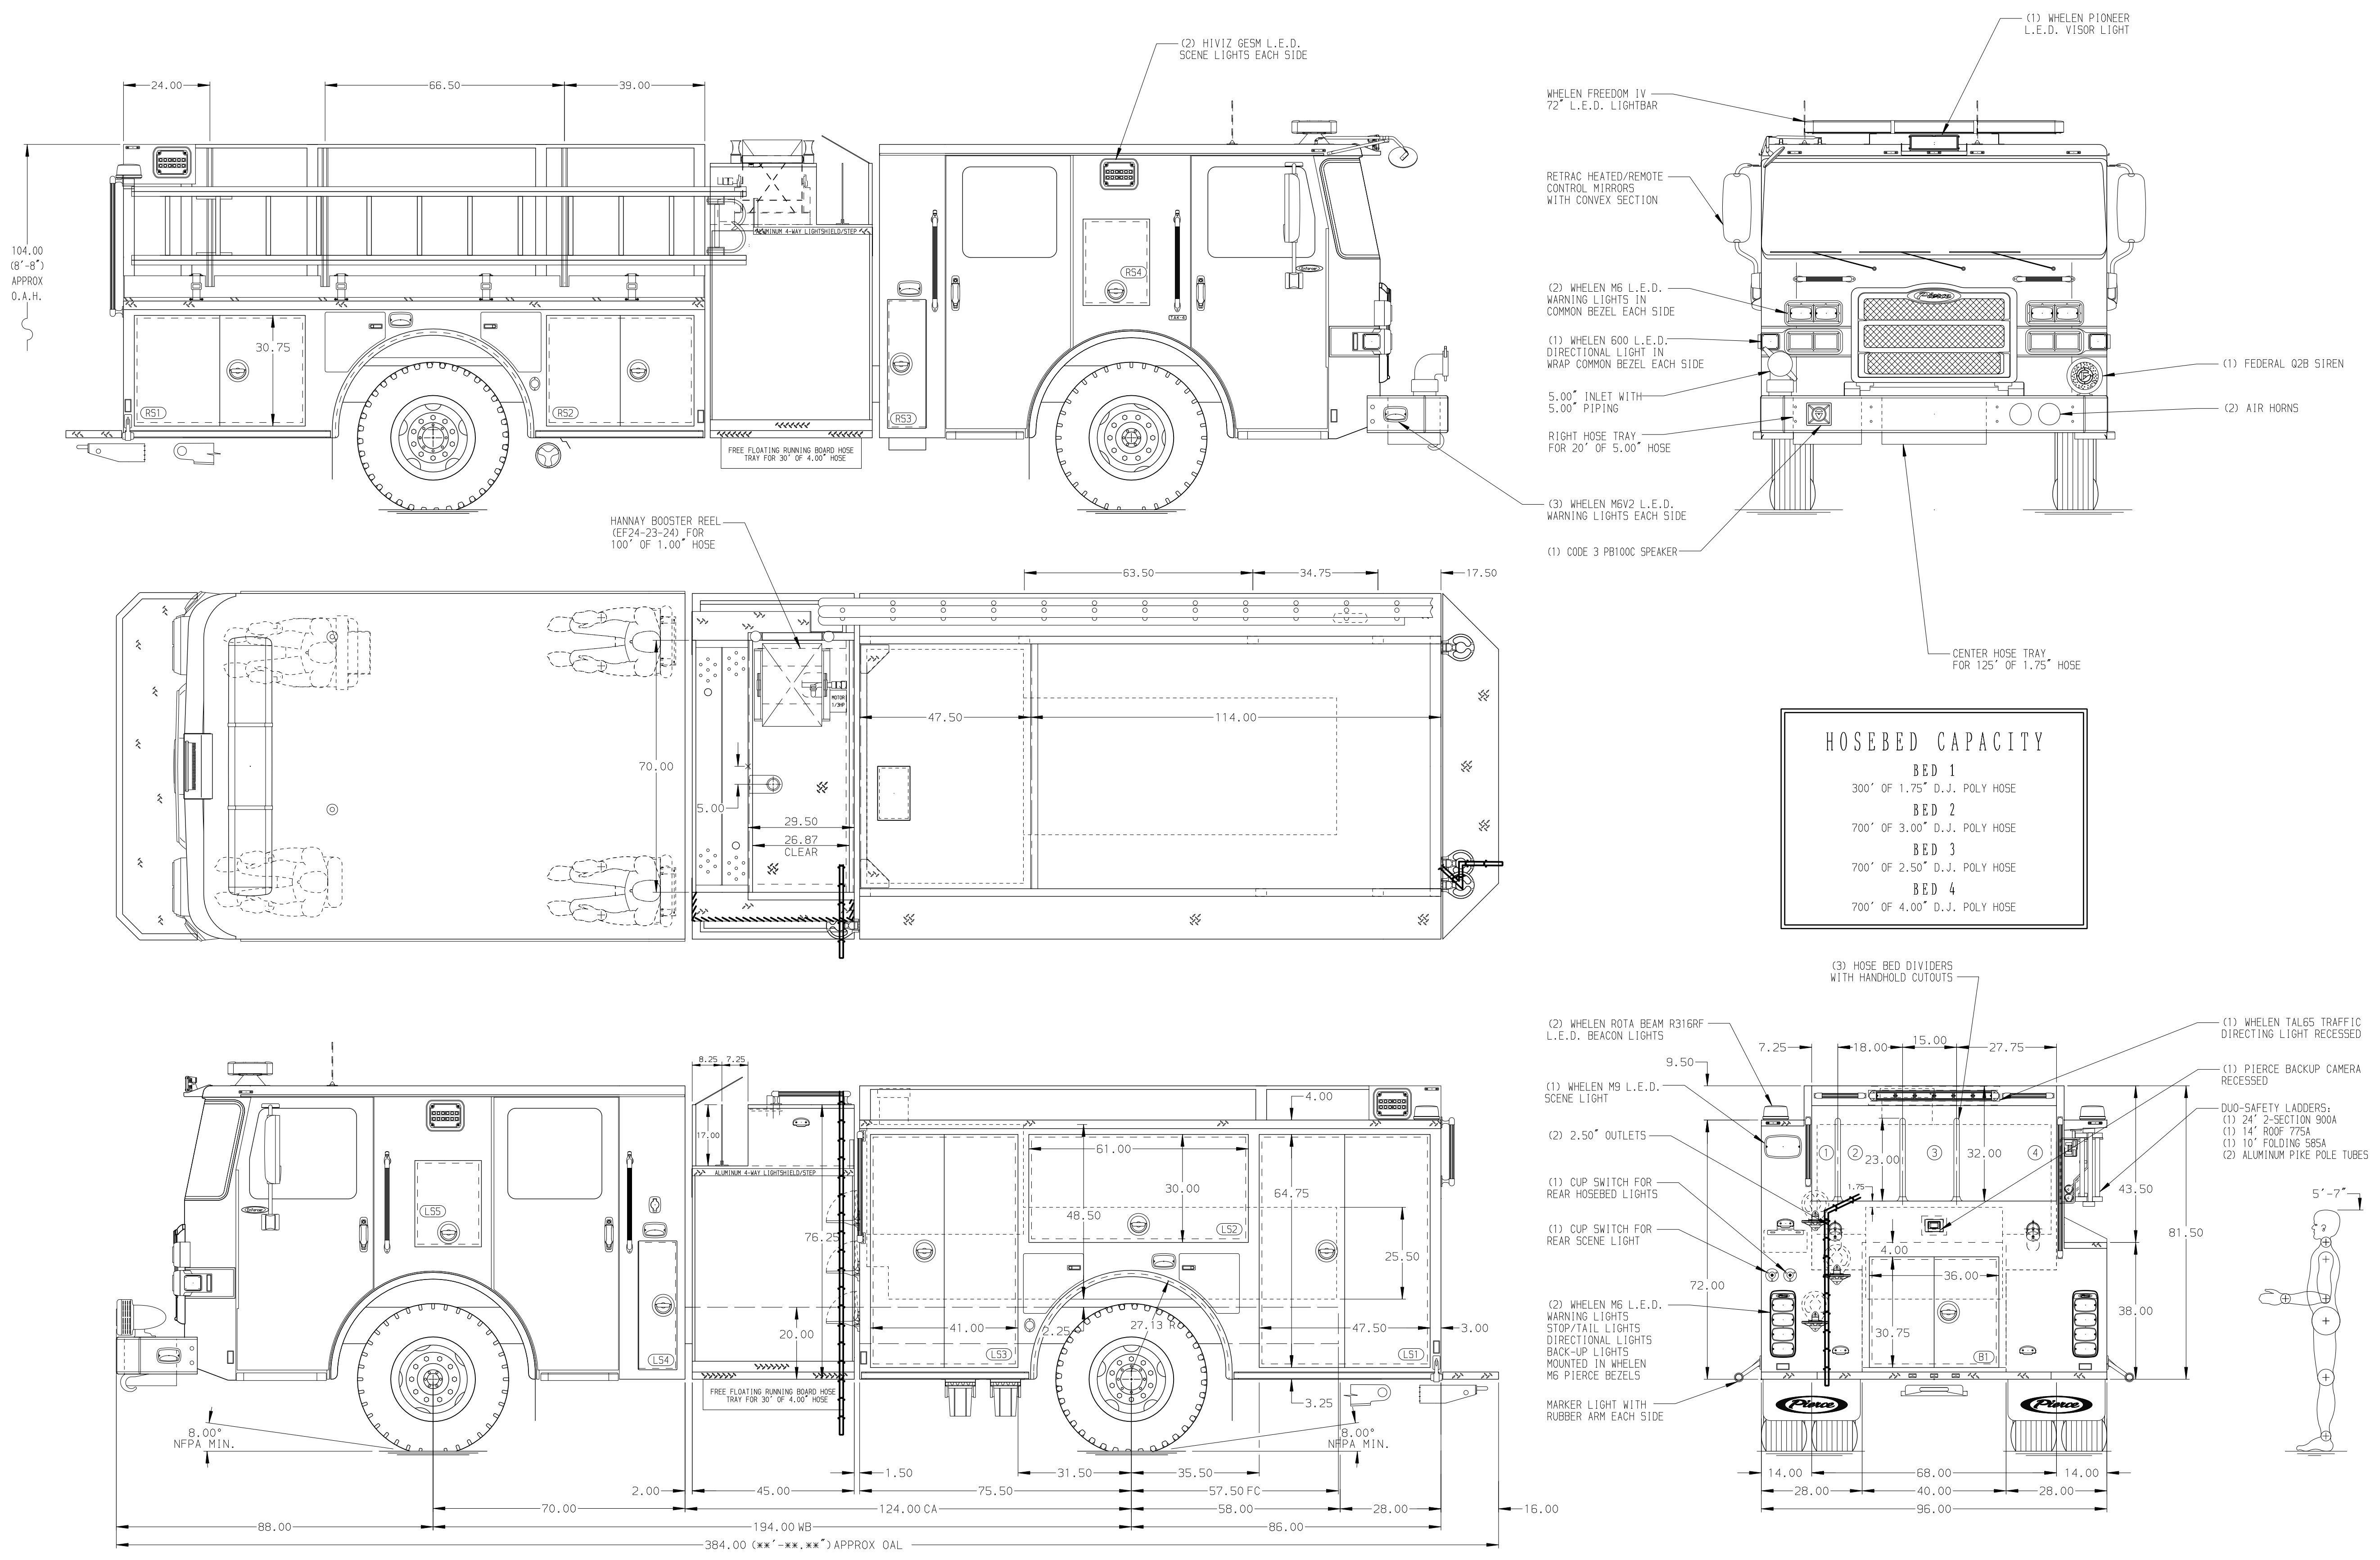

HOSEBED CAPACITY	
BED 1	300' OF 1.75" D.J. POLY HOSE
BED 2	700' OF 3.00" D.J. POLY HOSE
BED 3	700' OF 2.50" D.J. POLY HOSE
BED 4	700' OF 4.00" D.J. POLY HOSE

		JOB NO.	41222
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	AMI
FOR	City of Elmhurst Fire Department	CHECKED BY	AMI
DWG NO.	41222AD	SHEET SIZE	SHEET NO.
ENFORCER		D	1 OF 1

REV	DATE	BY	CH	ENFORCER
22JAN25	MMF	ZWE		CHASSIS DATA
09OCT24	MMF	ZWE		MAKE
01AUG24	MMF	ZWE		PIERCE
				MODEL