

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

24,000 Lb Dana Axle

ENGINE

510 HP Paccar MX13 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

22" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

770 Gallon New York Style Poly Tank

WATER CAPACITY

750 Gallons of Water

FOAM CELL

20 Gallons of Foam

COMPT, PUMPER, REAR

30.75" FF RoLup Rear Compt

COMPT, PUMPER, LEFT SIDE

145" RoLup Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

145" RoLup Low FDLER

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

SpeedLays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM

Foam System Not Required


SAFETY

Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 2.50" OUTLET WITH 2.50" PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- SIX ADJUSTABLE SHELVES LOCATED PER ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- PEGBORD ON BACK WALL PER SHOP ORDER
- PLUMBING FOR FUTURE FOAM SYSTEM

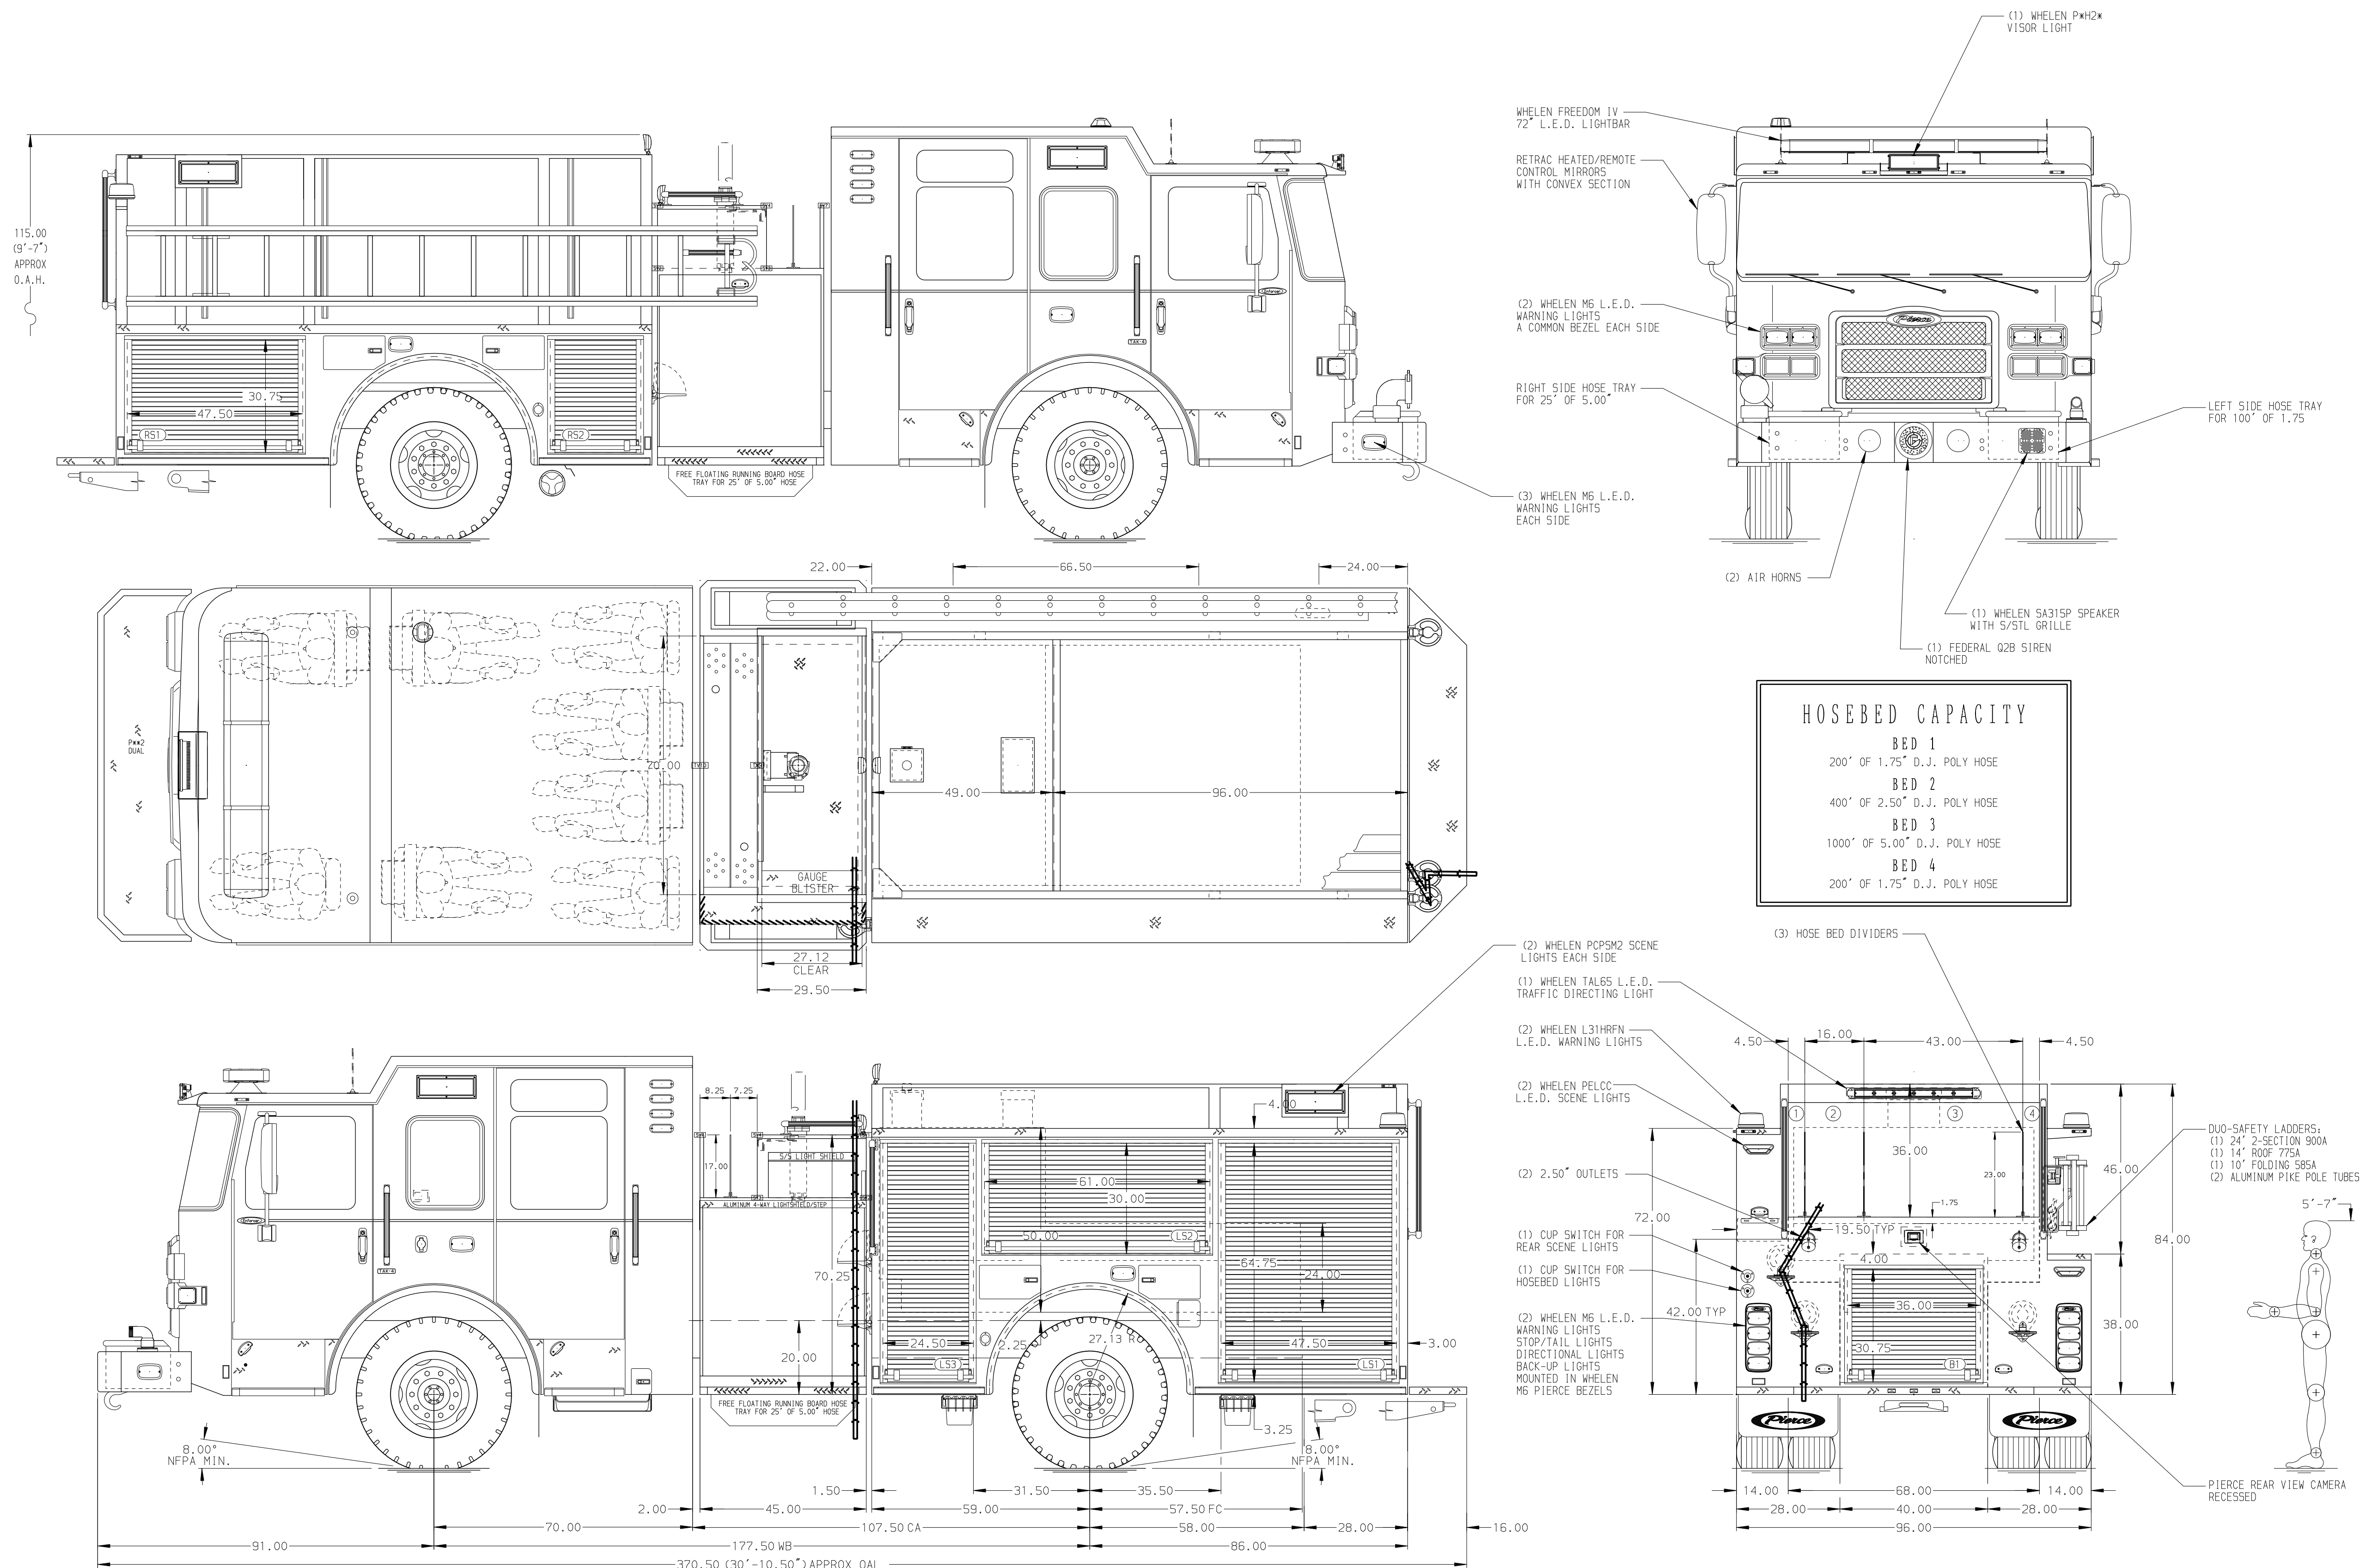

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
REV	DATE	BY	CH
14MAY24		MMF	AST

MANUFACTURING INC.		JOB NO.	41710
		SCALE	1:24
TITLE Pierce Pumper Approval Drawing MAKE Pierce FOR Pierce Field Unit		DATE	
		DRAWN BY	AMI 07MAR24
DWG NO. 41710AD		CHECKED BY	AST 7MAR24
		SHEET SIZE	D
		SHEET NO.	1 OF 1