

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

24,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

22" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY
770 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL
20 Gallons of Foam

COMPT, PUMPER, REAR
30.75" FF RoLup Rear Compt

COMPT, PUMPER, LEFT SIDE
145" RoLup Full Height Front & Rear FDler

COMPT, PUMPER, RIGHT SIDE
145" RoLup Low FDler

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Husky 3 Foam System


SAFETY

Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 2.50" OUTLET WITH 2.50" PIPING AND SWIVEL LOCATED ON TOP BUMPER LEFT SIDE
- SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
- SIX ADJUSTABLE SHELVES LOCATED PER ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- PEGBOARD ON BACK WALL PER SHOP ORDER

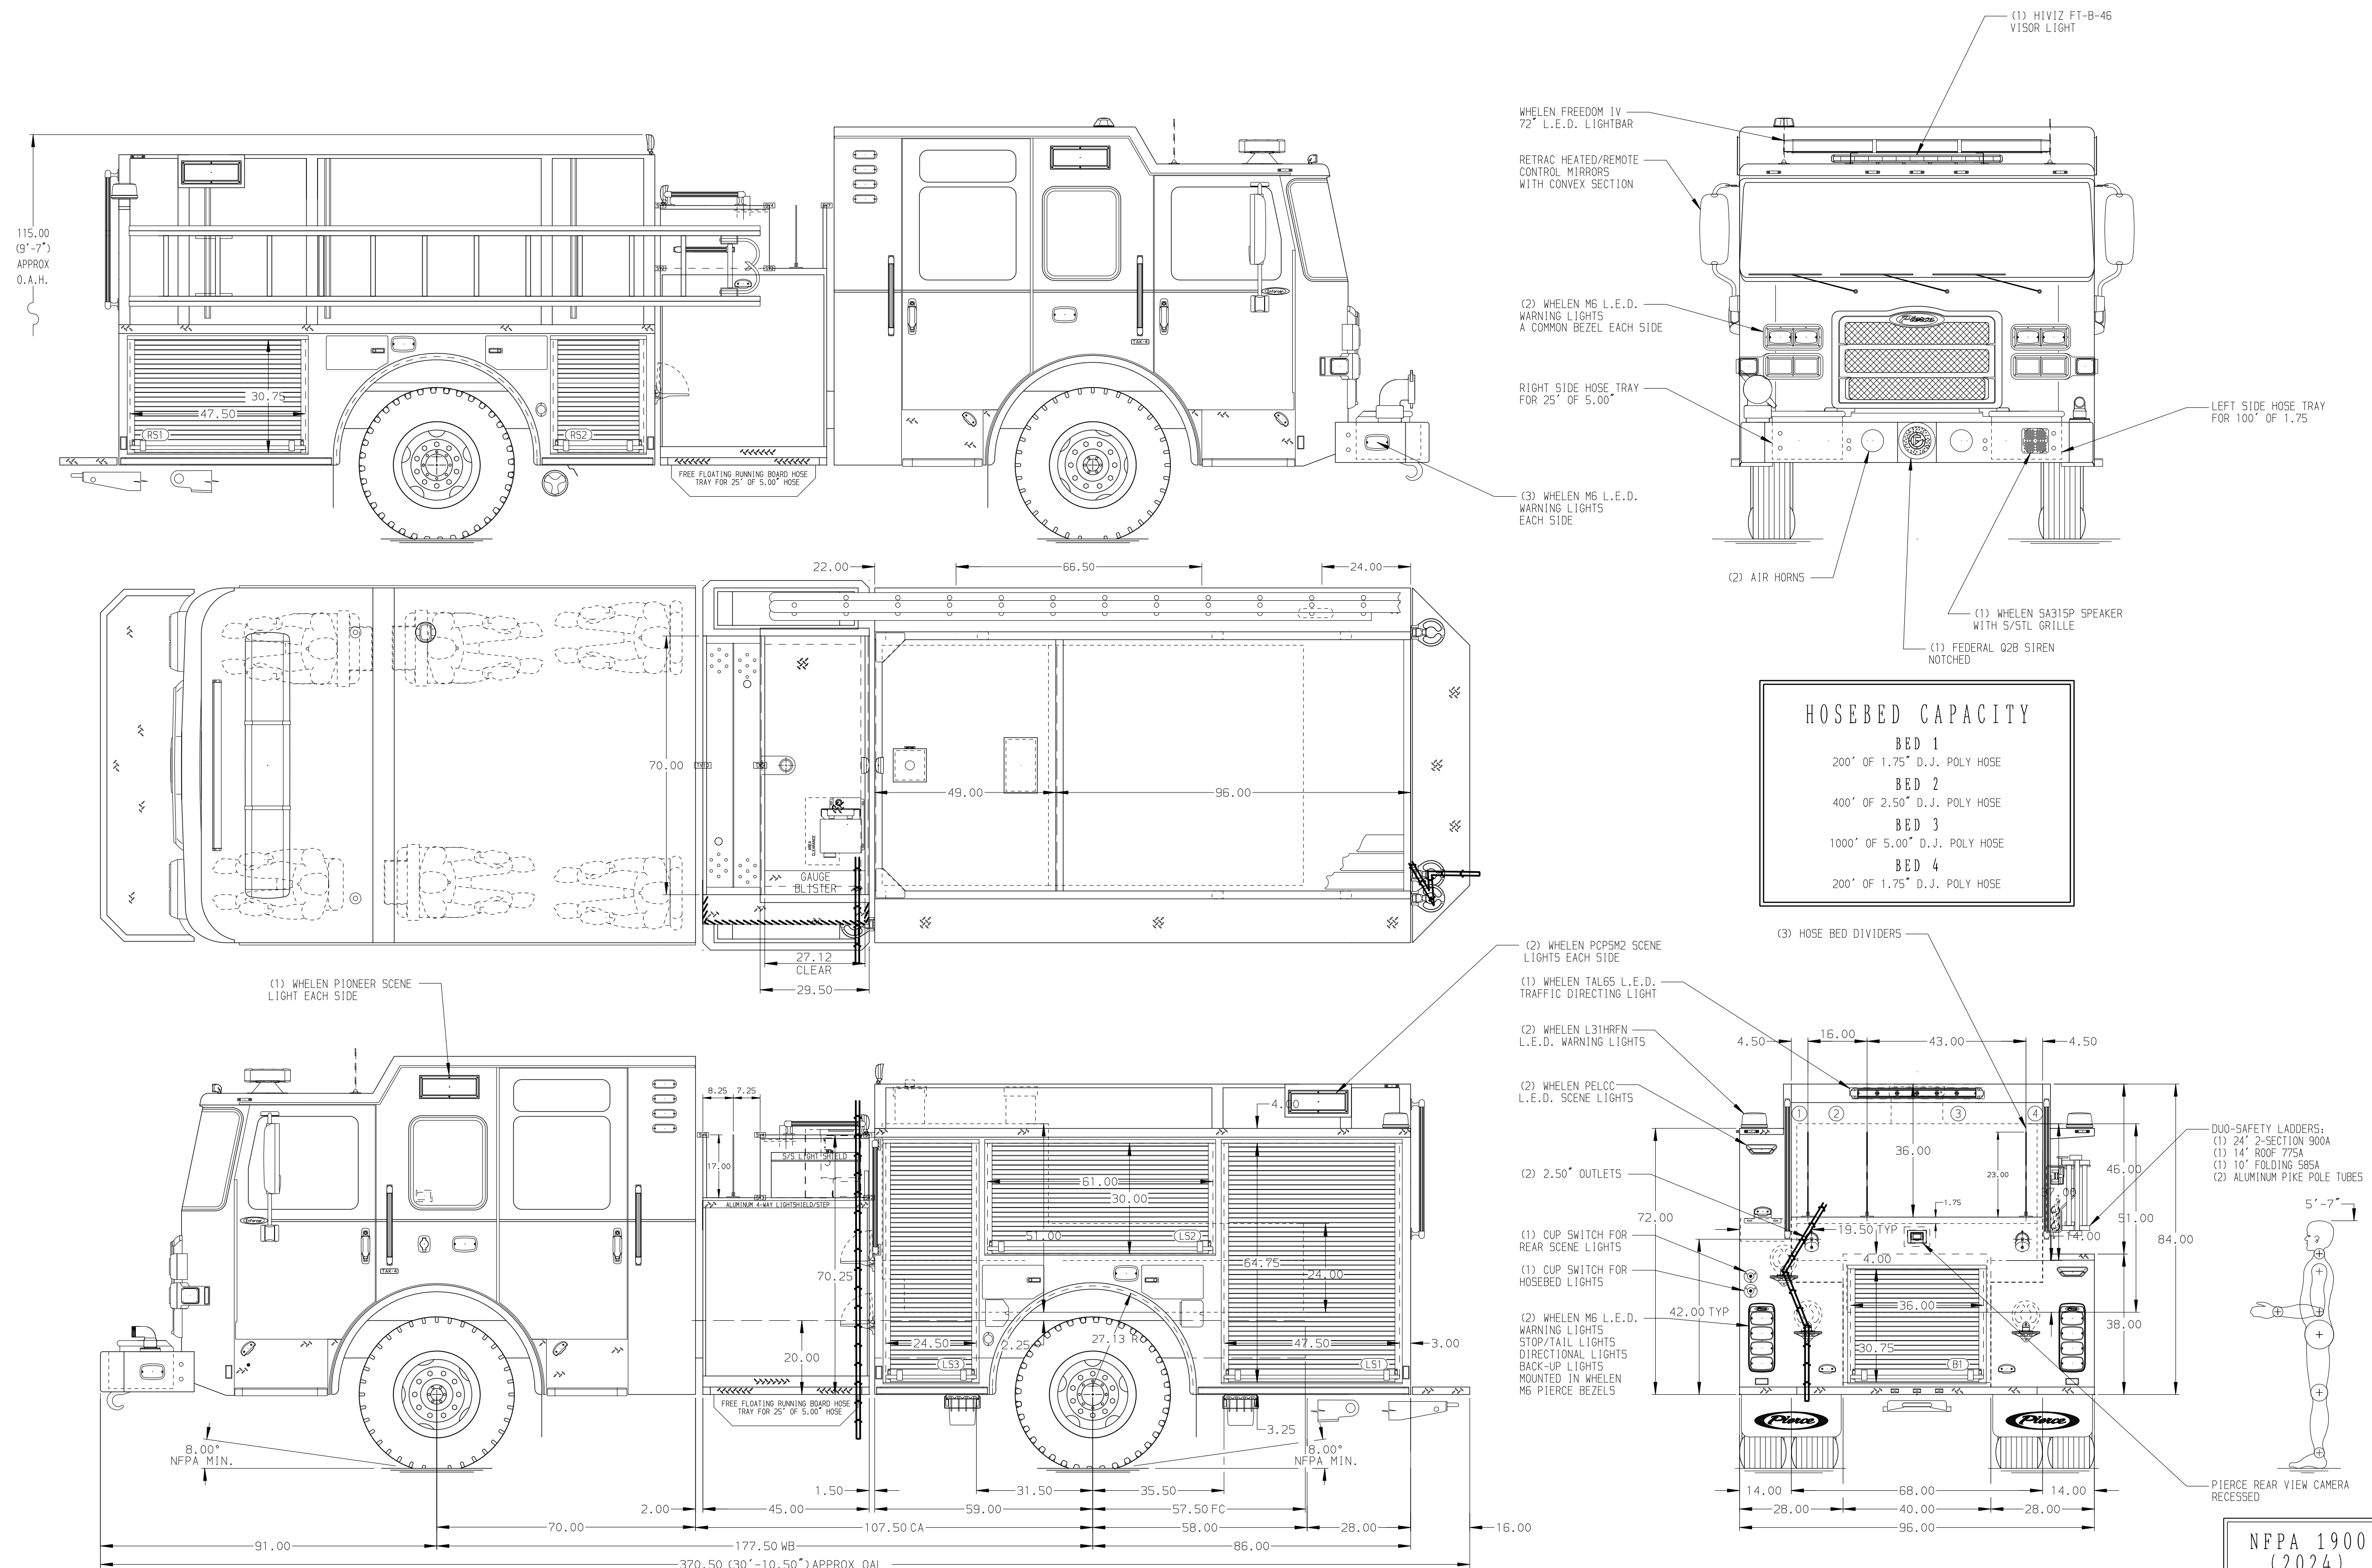

HOSEBED CAPACITY	
BED 1	200' OF 1.75" D.J. POLY HOSE
BED 2	400' OF 2.50" D.J. POLY HOSE
BED 3	1000' OF 5.00" D.J. POLY HOSE
BED 4	200' OF 1.75" D.J. POLY HOSE

CUSTOMER APPROVAL	
APPROVED BY:	_____
DATE:	_____
CHASSIS DATA	TITLE
MAKE	Pierce Pumper Approval Drawing
MODEL	Pierce Field Unit
ENFORCER	DWG NO.
	42491AD

Pierce MANUFACTURING INC.	
JOB NO.	42491
SCALE	1:24
DATE	_____
DRAWN BY	MMF
CHECKED BY	COS
SHEET SIZE	SHEET NO.
D	1 OF 1

NFPA 1900 (2024) COMPLIANT