


BODY 100' Ascendant Aerial Tower Alum Body COMPT, DRIVER SIDE Full Height RollUp Doors COMPT, PASSENGER SIDE Full Height RollUp Doors	WATER TANK 300 Gallon Poly Water Tank Foam System Foam System Not Required Foam Cell Foam Cell Not Required
---	---

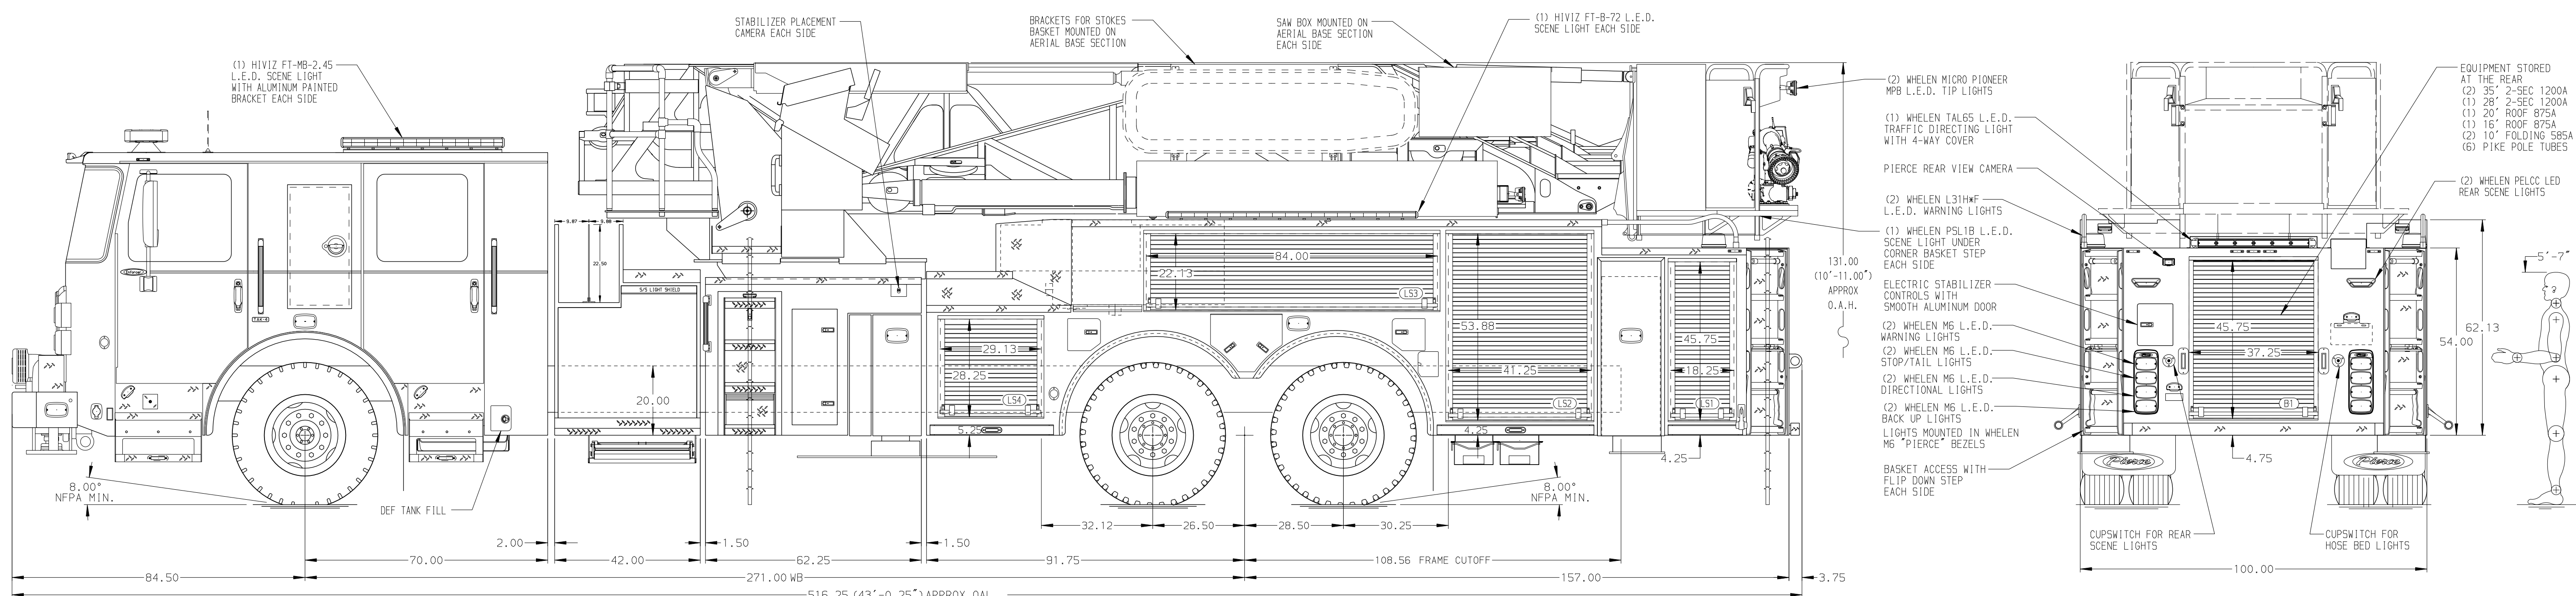

CHASSIS Enforcer Chassis ENGINE 510 HP Paccor MX13 Engine	CAB 7000 Enforcer Cab BUMPER 15" Extended Painted Aluminum	AXLE, FRONT, CUSTOM 24,000 Lb TAK-4 Axle AXLE, REAR 54,000 Lb Meritor Axle	TRANSMISSION Allison 6th Gen, 4500 EV5 P	PUMPHOUSE 42" Control Zone Side Mount PUMP 2000 GPM Waterous S100	CROSSLAYS, 1.50" (2) 1.50", 200' of 1.75" Hose CROSSLAYS, 2.50" 2.50" Crosslay Not Required	SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required	SAFETY Side Roll and Frontal Impact Protection	CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____	MANUFACTURING INC.	JOB NO. 42183
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.										SCALE 1:24
1. SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE FRONT CORNER OF THE CAB 2. AIR INLET WITH DISCONNECT COUPLING IN A RECESSED ALUMINUM TREADPLATE BOX IN THE DRIVER SIDE STEPWELL 3. BATTERY CHARGER LOCATED IN CAB BEHIND DRIVER'S SEAT 4. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER 5. SIX ADJUSTABLE FULL WIDTH/FULL DEPTH SHELVES IN COMPARTMENTS PER ORDER 6. FOUR SLIDE-OUT FLOOR MOUNTED TRAYS IN COMPARTMENTS PER ORDER 7. DIAL LIGHT STRIPS LOCATED IN COMPARTMENTS PER ORDER 8. NON-RAISED AERIAL PEDestal 9. DC POWER TO AERIAL TIP 10. 3-in-1 LYFECOMBO BRACKETS AT AERIAL BASKET 11. RUNG LIGHTING ON AERIAL LADDER 12. 2-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP AND TURNTABLE										DATE 25MAR24
TITLE 100' ASCENDANT AERIAL TOWER AND BODY ASSEMBLY MAKE PIERCE FOR PIERCE FIELD UNIT APPLETON, WI MODEL ENFORCER DWG NO. 42183AD										DRAWN BY ANZ
REV 25MAR24 ANZ AST DATE BY CH ENFORCER										CHECKED BY THS
SHEET SIZE D										SHEET NO. 1 OF 1